AD-A170 669

DTIC FILE COPY

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFIT/CI/NR 86- 86T	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE *(and Subtitle)* Implementation of the Numerical Electromagnetic Code (NEC-2) for Modeling the VOR Navigation System in the Presence of Parasitic Scatterers		5. TYPE OF REPORT & PERIOD COVERED THESIS/DISSERTATION
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(*s*) Paul R. Barre		8. CONTRACT OR GRANT NUMBER(*s*)
9. PERFORMING ORGANIZATION NAME AND ADDRESS AFIT STUDENT AT: Ohio University		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS AFIT/NR WPAFB OH 45433-6583		12. REPORT DATE 1986
		13. NUMBER OF PAGES 107
14. MONITORING AGENCY NAME & ADDRESS*(if different from Controlling Office)*		15. SECURITY CLASS. *(of this report)* UNCLAS
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT *(of this Report)*

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

DTIC
ELECTE
AUG 1 2 1986
E

17. DISTRIBUTION STATEMENT *(of the abstract entered in Block 20, if different from Report)*

18. SUPPLEMENTARY NOTES

APPROVED FOR PUBLIC RELEASE: IAW AFR 190-1

LYNN E. WOLAVER 6 AUG 86
Dean for Research and
Professional Development
AFIT/NR

19. KEY WORDS *(Continue on reverse side if necessary and identify by block number)*

20. ABSTRACT *(Continue on reverse side if necessary and identify by block number)*

ATTACHED.

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE
1 JAN 73

86 8 12 008

IMPLEMENTATION OF THE NUMERICAL ELECTROMAGNETIC

CODE (NEC-2) FOR MODELING THE VOR NAVIGATION SYSTEM

IN THE PRESENCE OF PARASITIC SCATTERERS

A Thesis Presented to

The Faculty of the College of Engineering and Technology

Ohio University

In Partial Fulfillment

of the Requirements for the Degree

Master of Science

by

Paul R. Barré

June 13, 1986

TABLE OF CONTENTS

I. INTRODUCTION AND SUMMARY

This project was funded by the Federal Aviation Administration (FAA) under Contract DTFA01-85-Y-01020. The FAA is interested in collocating VHF communication antennas on VOR sites, rather than obtaining new sites for these antennas. Since, the communication antennas are vertically polarized (the VOR is a horizontally polarized system), it is felt that the chance of success in collocating these antennas on a VOR site without unacceptably degrading the VOR is good. If this proves to be the case, these antennas will be collocated at VOR sites, thus offering considerable cost savings. To physically measure the best place to locate each VHF antenna that is to be put on a VOR site would be prohibitively expensive. For this reason the FAA is interested in the development of a computer model that can predict the optimum placement of VHF communication antennas on a VOR site.

Consequently, a computer model has been developed that estimates bearing error for a VOR airborne navigation system operating in the presence of small, parasitic scatterers such as antennas, antenna masts, and guy wires. Parasitic scatterers are radiating elements whose radiation is induced by other electromagnetic radiation rather than by a connected power source. These parasitic scatterers can disturb the very signals that caused them to radiate. Because this VOR model can account for the effects of an arbitrary parasitic scatterer on VOR performance, it is thought of as a *general* VOR model and, so, was named GVOR.

Model GVOR uses the Numerical Electromagnetics Code (NEC-2) to model the four Alford Loop antennas in a VOR array, to define small parasitic scatterers, as well as to calculate the effects of these scatterers on the radiation patterns of the four antennas. NEC-2 is a user-oriented computer code for analysis of the electromagnetic response of antennas and other metal structures [1]. This commonly used code has been validated by numerous studies [2], [3], [4], [5]. Because NEC-2 is an established and validated code, it was not modified in the development of the VOR model, so as to preserve its integrity.

Program GVOR, a FORTRAN-77 routine, reads the output from NEC-2 to obtain the pertinent scattered-field data. These data are then used to construct the VOR audio waveform and to calculate the indicated bearing at the airborne receiver location, including the effects of parasitic scattering as given by NEC-2. The azimuth angle of an aircraft with respect to a VOR station is determined by the phase of the received audio sinusoid generated by a limacon radiation pattern that rotates in space due to appropriate time-varying phasing between four Alford loop antennas. To model the effects of scatterers on system accuracy, each loop antenna is sequentially modeled in the presence of the scatterer using NEC-2, and field data are recorded for a far-field orbit around the source-scatterer configuration; this process is repeated for each of the four loop antennas thus providing complete information about complex path loss between each loop antenna and the observation point in the presence of the scatterer. The received audio waveform is then constructed at each observation point by applying the appropriate

modulation to each of the loop antennas, adjusted by the complex loss values given by NEC-2. Next, the phase and distortion of the received audio waveform is then determined using a Fast Fourier Transform algorithm, giving an indication of VOR degradation due to parasitic scattering. Modeled results, consisting of plots of bearing error versus "true" bearing, are then compared to measured data.

The measured VOR bearing data, which was collected in a previous study [6], is suspected to have problems, however. In some cases the agreement theoretically expected between data from the near zone and data from the far zone is not reflected in the actual measurements. When the modeled data are compared to these cases, the correlation between the modeled and the measured data is not good. However, when the near zone data and the far zone data match up well, so do the modeled data. Although there are suspicions that some of the measured data are bad, the respective comparisons with modeled data were included for completeness. Overall, because the modeled data shows the same periodicity as the measured data, and exhibits nearly the same peak error when the near and far measured data agree, and because of the model s proper prediction of VOR system response (octantal error), it is felt that the modeling approach is valid.

II. MODEL DEVELOPMENT

A. Theory of Operation for the VOR Navigation System

1. The Omnirange Principle

VOR is an acronym for Very-high-frequency Omni-directional Range. This navigational aid, as the name implies, operates in the VHF band of the radio wave spectrum, and radiates its navigation signals in all directions [7]. In understanding the omni-directional range principle (also called "omnirange") that is employed by the VOR, the following analogy may be helpful.

Imagine a visible laser beam arranged so that it rotates in a horizontal plane (X-Y for simplicity) at the constant angular frequency of 30 revolutions/sec. Also, imagine an isotropic point source that emits visible light in all directions in observable, yet almost instantaneous, flashes. This point source is collocated with the laser and flashes 30 times per second. The system is synchronized so that the point source flashes when the laser is beaming up the positive Y axis, where the Y axis represents a zero degree radial pointing towards magnetic north. Figures 1A, 1B, 1C, and 1D picturize this hypothetical omnirange system. The origin of the circular coordinate system represents the point where the laser and the isotropic source are collocated. The numbers marked with the degree symbol indicate a few of the many possible course bearings (radials). The line extending radially outward from the origin represents the laser beam. In Figure 1A, the laser is rotating clockwise at its constant angular frequency of 30 revolutions/sec, and

is pictured as pointing north, at the zero degree radial. The concentric

circles represent the emissions of the synchronized isotropic point

source. In Figures 1B and 1C, the laser continues to rotate clockwise,

but the point source does not transmit again until the laser is pointing

north, as in Figure 1D.

OMNIRANGE SYSTEM
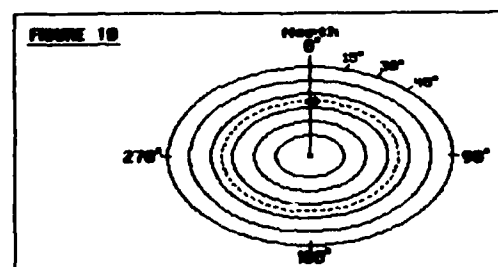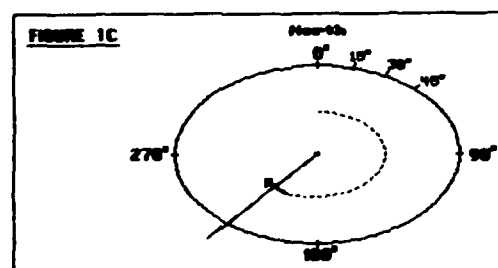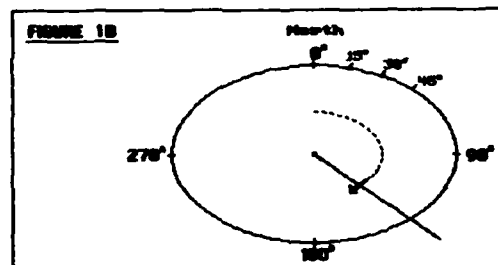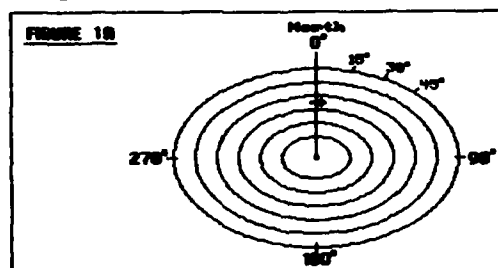
If an interested observer notes the time when the point source flashes
(t_1), and a'so notes the time when the laser points in his or her
direction (t_2), the observer can deduce radial position with respect to
the system in the following manner:

$(t_2-t_1)[sec] * (2*PI*30)[rad/sec] * (180/PI)[deg/rad]$ = Radial Position

or   Radial Position $[deg]$ = $(t_2-t_1) * 60 * 180$

The VOR system uses the omnirange principle in a manner similar to the
"point-source & laser" system described above. In the discussion that
follows, the *VOR reference signal* is analogous to the isotropic point
source, and the *VOR variable signal* is analogous to the laser beam.

2. VOR Basics

The following description is that of an ideal VOR system. The VOR
navigation system operates in the high frequency band of the RF spectrum
with a carrier frequency ranging from 108 to 118 MHz. The navigational
information radiated by the VOR is contained in two mutually exclusive,
horizontally polarized, 30 Hz signals. To avoid interaction by the two
signals, thereby preserving the navigation information, one is frequency
modulated upon the carrier (the reference signal), and the other is
amplitude modulated upon the carrier (the variable signal). The
navigational information is obta:ned by comparing the relative phases of
the two received, demodulated, 30 Hz signals [8].

The *VOR variable signal* is generated by an antenna array that is
configured to provide a radiation pattern that has the shape of a

"limacon" and which rotates at 30 revolutions per second. A limacon is

very similar in appearance to a cardiod but has one main difference:

the curvature of a limacon is sinusoidal. That is, the distance from

the center of the limacon to its border varies sinusoidally as the

limacon is traced out. When a rotating limacon radiation pattern is

observed by a stationary observer, the demodulated variable signal

appears sinusoidal, with the frequency of the sinusoid equal to the rate

of the limacon's rotation. Figure 2 shows, for two points on the

limacon, which part of a sinusoid the observer sees when the respective

point on the limacon passes by. This radiated limacon is the "heart" of

the VOR variable signal since the variable signal is actually the

limacon pattern amplitude modulated upon the VHF carrier signal [9].

FIGURE 2
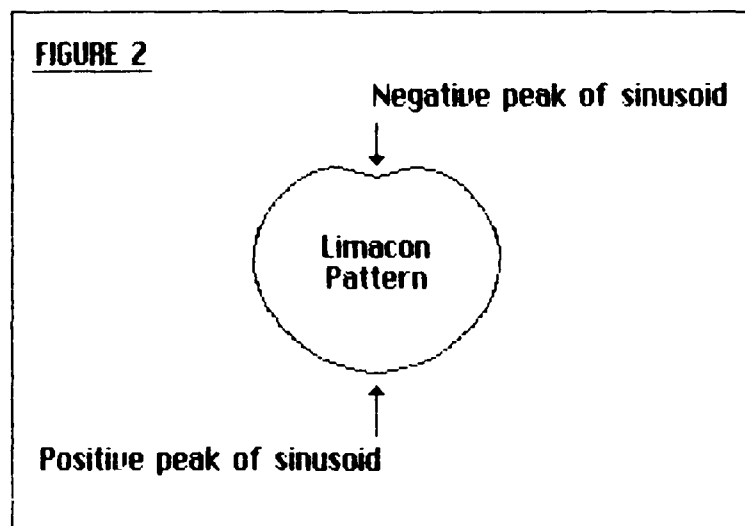
The main characteristic of the VOR variable signal is that its phase as

received by the observer depends upon the radial position of the

observer with respect to the VOR. This is a direct result of the

rotating limacon radiation pattern. Another result is that, with the

distance from the VOR held constant, the observed phase of the variable signal changes degree for degree with each change in the radial position (azimuth angle) of the observer around the VOR. The *VOR reference signal*, to the contrary, has the characteristic that its audio phase is independent of the azimuth angle (the radial position of the observer with respect to the VOR). This means that, given a radial distance from the VOR, the phase observed at that distance is constant, independent of the azimuth angle [10].

As mentioned earlier, the navigation information of the VOR is contained in the reference and variable signals. By definition and design, *the angular course about the VOR is equal to the number of degrees by which the variable signal lags the reference signal* [11]. If the VOR is observed at the particular radial of 0 degrees (magnetic north), it would be found that the reference and the variable signals are in phase, similar to the point source flashing when the laser pointed north in the above analogy. If the VOR is then observed from the 5 degree radial, the reference signal would still have the same phase that it did at zero degrees since its phase is independent of azimuth angle, but the variable signal would be delayed 5 degrees from its previously observed phase. Therefore, a course bearing of 5 degrees would be obtained [12].

Theoretically, the VOR can provide an infinite number of courses (radials) to the aircraft because there are an infinite number of radials extending from the VOR. Realistically, the tolerance of the VOR is such that it can accurately provide at least 360 courses, which conveniently converts to one course for each degree of azimuth.

Therefore, VOR instruments in aircraft are calibrated for the 360 degrees of azimuth, with 0 degrees indicating magnetic north. Since the locations of VOR sites are accurately known, an aircraft's position can be established by use of a VOR signal in conjunction with distance measuring equipment (DME), so as to determine not only at what angle the aircraft is from the VOR but also how far away it is. Another method to determine an aircraft's location is to receive bearing data from two nearby VOR'S and then use triangulation for a position fix. VOR's have a range of at least 40 miles and up to about 100 miles [13].

3. Summarization of VOR Basics

* For a given observation point, both of the received 30 Hz signals, reference and variable, are sinusoids. At 0 degrees azimuth (magnetic north), these two sinusoids are in phase.

* The VOR variable signal is so named because its phase varies with respect to the radial position of the observer. The phase of the reference signal, in contrast, remains constant with respect to the radial position of the observer.

* The angular course about the VOR is equal to the number of degrees by which the variable signal lags the reference signal.

B. Theory of Operation for the "Ideal VOR Model" (program KCVOR)

Initial work with VOR modeling was directed at characterizing the performance of an ideal system, one that was not influenced by parasitic scattering. This initial work resulted in a model named KCVOR, which was shown to be operating properly by its correct estimation of octantal errors and system response to variations in the Alford Loop antenna patterns. The VOR model that does account for parasitic scattering effects, GVOR, is an extension of KCVOR, and thus an understanding of the theory of operation of KCVOR is a necessary background for the understanding of GVOR.

KCVOR was designed to estimate VOR bearing error for the following scenario: An airplane flies a circular orbit around a VOR facility at a pre-determined elevation and radius. For equi-spaced observation points around the orbit (5° azimuth angle increments), one period of the VOR's signal (1/30 of a second) is sampled. This is done 73 times, once for every 5° between 0° and 360°, inclusive. But before the next sample is taken, the present sample is analyzed for its navigation information. That is, a radial measurement is obtained from the sample that tells how many degrees in azimuth the aircraft is from magnetic north of the VOR facility. This derived position is then compared to the true azimuthal position of the aircraft, which is defined explicitly by the model. The modeled VOR bearing error, which is the difference between the two position values, is saved at each azimuth angle sampled. At the end of the modeled flight, an error curve is generated using the saved values. The different errors obtained around the orbit are displayed versus the

true radial position of the aircraft, thereby giving a graphical indication of how well the modeled VOR performed.

Many VOR system parameters can be varied within KCVOR. This includes the system's carrier frequency, the Alford Loop antenna positions and radiation patterns, the phase shift and/or attenuation in any of the four Alford Loop antennas, and the modulation scheme produced by the goniometer (the VOR variable signal generator).

A flowchart of KCVOR is illustrated in Figure 3. It should be noted that no mention is made of the VOR reference signal in this algorithm. Recall that one of the characteristics of the VOR reference signal is that its phase is constant at a given radial distance from the VOR, independent of the azimuth angle. The model uses this property rather than constructing the reference signal in the program. Because time and source/observer geometry are calculated by the model, the audio phase of the reference signal can be computed at any point in space. The only assumption made in the model estimation of the reference signal is that the audio phase of that signal is not affected by multipath effects, a reasonable assumption for the modulation and carrier frequencies involved. In the model, the reference and variable signal audio phases are equal at zero degrees azimuth, as is true with an actual VOR installation. The bearing angle, as determined by the VOR, is the audio phase angle difference between the reference and variable signal.

FLOWCHART OF KCVOR

Start

Establish a coordinate system and then position four isotropic point source antennas for use as a VOR transmitting array.

Initialize constants
KNT=0

Position the observation point in space

KNT=KNT+1

Calculate the complex currents that would be fed to each of the Alford Loop antennas, as a function of time, from the goniometer.

Determine free-space path loss and phase shift between each of the Alford Loop antennas and the observation point, including the effects of the radiation pattern of each of the Alford Loop antennas.

Form the received field at the observation point due to the VOR variable signal, as a function of time over one period of the audio waveform (1/30 of a second).

Obtain phase information from the time-domain-VOR variable signal using a Fast Fourier Transform (FFT) algorithm.

Calculate VOR bearing error by subtracting the derived phase angle of the VOR variable signal from the "true" azimuth angle of the modeled observation point.

Output error, derived azimuth angle, and "true" azimuth angle.

N ← KNT=73 ?

Y

Generate plot of error versus "true" azimuth.

Stop

Figure 3: Flowchart of ideal VOR model -- program KCVOR

Model operation, as described in the flowchart, can be broken down into
four distinct categories:

* system construction and initialization

* signal construction and sampling

* signal processing

* bearing error determination and output.

1) System construction and initialization

In KCVOR certain data are defined by the model. These are: time,
position of the observation point, audio and carrier phase of the VOR
reference signal as described above, the carrier frequency, the
frequency of the VOR audio signals (30 Hz.), the speed at which the VOR
signals propagate through space (the speed of light), and the locations
of the VOR transmitting antennas. This information is defined in the
program either explicitly in the form of declared constants, or
implicitly in the form of logic flow.

The VOR variable signal is mathematically constructed from the
transmissions of four isotropic point sources, where these point sources
are models for the four Alford Loop antennas that compose the physical
VOR transmitter array. Although this type of source is ideal and
physically unrealizable, it provides an antenna pattern that results
in minimal bearing error [14]. These transmitting elements are located
symmetrically as shown in Figure 4, which is a typical configuration for
a VOR array [15]. A Fortran Data statement is used to establish the
locations of the point sources to the program.

Figure 4: Arrangement of VOR Transmitting Antennas
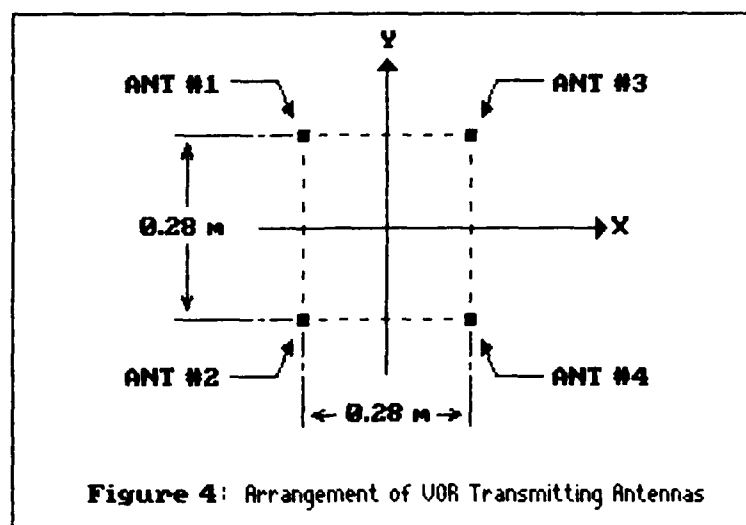
With the antenna locations established, the constants initialized, and
the aircraft in position, KCVOR proceeds as follows: First, the X-Y
coordinates of the aircraft's position are determined. Then, the
aircraft's distance from the origin is calculated, and, using this
information, the distance from each antenna to the aircraft (observation
point) is obtained.

Equations defining the formation of two "radiating pairs" out of the
four point source antennas are calculated next. In an actual VOR
system, there are two output lines from the goniometer which provide the
audio modulation. The output on these two lines are identical except
for a 90 degree phase shift at the audio frequency. One of the output
lines is connected to antenna pair #1 and the other is connected to
antenna pair #2. Equal amplitudes of the modulated signals are fed by
the goniometer to each antenna pair. Further, each goniometer output is
split equally and then passed through a half wavelength cable before
being sent to one of the antennas in a pair, so that the relative phases

FIGURE 5: Radiating Pairs
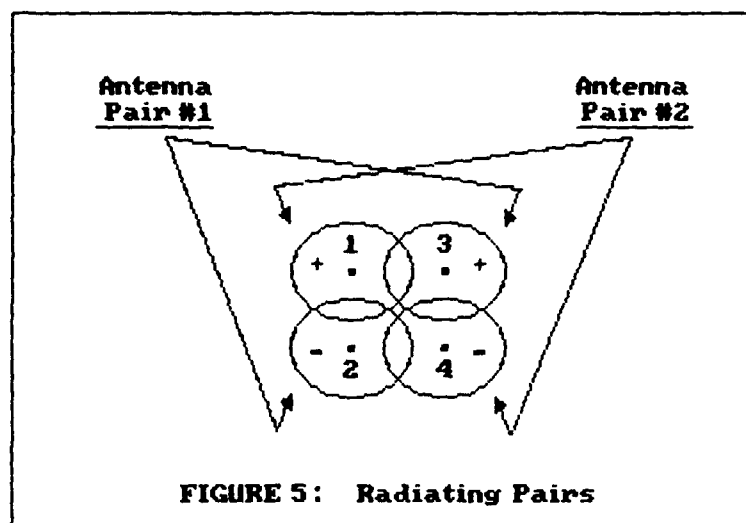
within a pair, at the carrier frequency, differ by 180 degrees, as
indicated by the + and - signs in Figure 5 [16]. Calling CE_n the
complex electric field transmitted by antenna "n", where CP1 represents
radiating pair #1 and CP2 represents radiating pair #2, the program
forms the two radiating pairs in the following manner:

$$CP1 = CE_1 - CE_3$$

$$CP2 = CE_2 - CE_4$$

where the minus signs account for the 180° phase shifts introduced by
the half-wavelength cables.

2) Signal construction and sampling

KCVOR's main function is to calculate the phase of the VOR variable
signal at a specified sampling location, because, as mentioned earlier,
the phase (in degrees) of the variable signal is numerically equal to
the VOR-estimated azimuth angle. The procedure to mathematically
construct the variable signal is addressed here.

The composite received signal at the observation point is calculated by summing the complex-valued contribution from each of the four Alford Loop antennas. The phase relationship bet..een the signals received from each of the antennas is proportional to the distance between an antenna and the observation point; the proportionality constant is the wave number. Because a far-field approximation is assumed, the 1/R field strength dependence is omitted in calculations by KCVOR. Specific equations used by the model to determine the received VOR variable signal are given in Appendix A, along with a description of a method that normalizes distance values so as to minimize round-off errors by reducing the size of the complex-valued argument in the exponential function.

For each of the 5 degree azimuth positions sampled during a modeled orbit, a time-domain sequence of received variable signal values are generated for a period representing 1/30th second, or one period of the VOR audio signal. The phase information used to determine VOR bearing is contained in this time-domain waveform. As is described in the following section, phase information is extracted from this computed waveform using a double precision, decimation-in-time, fast Fourier Transform (FFT) routine, which is resident in the model. In order for the sampled waveform to be compatible with the FFT input requirements, 2^N equi-spaced samples are needed [17]. To provide the necessary resolution for this application, an N of 8 was selected, which corresponds to 256 time samples within the 1/30th second interval. The

phase value returned by the FFT routine is then compared with the known

azimuth angle to generate an error value for that observer position.

3) Signal processing

As mentioned above, a double precision, decimation-in-time, fast Fourier

Transform provides the signal processing function for the model. A

signal x(t), where t stands for time, can be represented as a linear

combination of a set of elementary time functions such as sin(wt) and

cos(wt) [18]. When an FFT transforms a discrete time signal, such as

the sampled VOR variable signal, into the frequency spectrum, it

determines the complex-valued frequency components that were linearly

combined to form that signal. All of the derived components are based

on sine and cosine functions, with each part having an unique frequency,

and an associated phase and magnitude [19]. It is the phase of the 30

Hz component of the variable signal that this model obtains from the

FFT.

When the frequency spectrum
of the sampled signal is
output by the FFT, KCVOR
only looks at the second
component. The reason for
this is that the first one
is the D.C. component (w=0),
leaving the frequency of
interest, 30 Hz., as the

Phase of the 30 Hz. signal component can be calculated by:

$$Phase = tan^{-1}\left[\frac{imag. part}{real part}\right]$$

Figure 6 : FFT Frequency Component
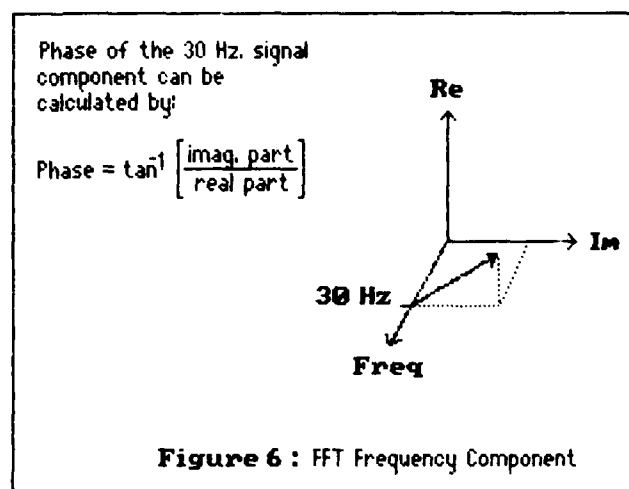
next component. No frequency lower than 30 Hz. (trivial case of w=0

neglected) was included in the mathematical signal construction. The

real and imaginary parts of this 30 Hz. component can be used to

determine the phase and magnitude of the VOR variable signal as it was

sampled at the aircraft. But only the phase information is of interest,

so only it is calculated. Figure 6 gives a graphical presentation of

the information stored in a typical frequency component output by the

FFT.

As is shown in Appendix A, where the mathematical construction of the

variable signal is described, the variable signal is composed of a sine

term and a cosine term. If such a function is input to the FFT with

both phase terms set to zero [e.g. $x(t) = \cos(wt+0) + \sin(wt+0)$], the

phase of the frequency component depicted by "w" is found to be -45

degrees, not 0 degrees as might be expected. In a VOR system, it is

necessary that the variable signal and the reference signal be in phase

on the zero-degree radial. Since the phase of the reference signal in

FCVOR is always zero degrees, the phase of the variable signal must

compensated so that it too is zero degrees on the zero-degree radial.

This is done by adding 45 degrees to the value of phase obtained from

the FFT (-45+45=0).

In a physical VOR system, the tone wheel generates the reference signal,

and the goniometer generates the variable signal. Although the two

generated signals are isolated, both of the signal generators are

mechanically coupled to the same synchronous motor (1800 rpm). Because

the two devices are driven by the same motor, the initial phase

relationship between the two signals is determined by their relative positions on the motor shaft. So, to compensate for the 45 degree phasing problem mentioned above, the real world solution is to place the goniometer on the motor shaft so that it lags the tone wheel by 45 degrees [20].

4) Error determination and output

In this final step, KCVOR has calculated the phase of the variable signal as determined by the FFT. The bearing angle is then calculated by:

COURSE = VARIABLE SIGNAL PHASE - REFERENCE SIGNAL PHASE + 45 DEGREES

Since it is assumed that the phase of the reference signal is always 0°, the course is simply the phase of the variable signal plus 45°.

KCVOR next determines the error between the computed azimuthal position of the observation point and the point's actual position. The calculated bearing angle is subtracted from the "true" bearing angle to get the error incurred in the VOR signal transmission process. The true bearing angle is determined from the origin of the coordinate system, which represents the center of the VOR site, and the location of the observation point, which represents the position of the aircraft. Since the program specifies the location of all observation points, it knows their true location as accurately as the computer's double precision arithmetic. The error, the true bearing angle, and the calculated bearing angle are then output to the user. After this loop

is executed 73 times, a plot of bearing error versus true radial

position is generated.   The program then terminates.

C. Theory of Operation for the "General VOR Model" (program GVOR)

The VOR model described here is designed to predict the bearing errors in a VOR navigation system due to parasitic scatterers in the vicinity of that system. The model has two distinct parts:

(1) An unmodified version of the Numerical Electromagnetics Code (NEC-2) is used to model a VOR antenna element and to calculate its far field radiation pattern. Small parasitic scatterers, such as antennas, antenna masts, guy wires, or other conductors of arbitrary shape, are simulated near the antenna element, whereupon NEC-2 calculates the modified radiation pattern due to the interactive effects of the VOR antenna and the parasitic scatterers. This code uses the method of moments to obtain the desired solutions [21]. To model the effects of a scatterer on VOR system accuracy, each loop antenna is sequentially modeled in the presence of the scatterer, and field data are recorded for a far-field orbit around the source-scatterer configuration; this process is repeated for each of the four loop antennas thus providing complete information about complex path loss between each loop antenna and the observation point in the presence of the scatterer.

(2) A FORTRAN program, called GVOR, reads the output generated by NEC-2 to obtain the pertinent scattered-field data. Then, for each observation point along the orbit, GVOR combines these data into the signal of a VOR antenna array, and then determines the navigation information present in the signal. This is done by

applying the appropriate time varying phasing between the output of

the four Alford Loop Antennas (as provided by NEC-2), and then

using an FFT to determine the phase and distortion of the received

signal. If scatterers are present in the NEC-2 part of the model,

then their effects on an ideal VOR signal are evident in GVOR's

output. This output consists of the "true" azimuth angle as

defined by the model, the calculated azimuth angle (which is based

on the FFT's output), and the error between the two. A code

listing of GVOR is given in Appendix B.

These two parts of the VOR model are discussed in the following

sections, along with the assumptions made in the modeling process. The

key points addressed include: some features and limitations of NEC-2,

the modeling of conducting structures, approximations for modeling the

Alford Loop antenna (which involves attempts at surface patch

excitation), representation of the ground plane, and the VOR modulation

scheme.

1. NEC-2 -- Part One of the "General VOR Model"

a. The Numerical Electromagnetics Code (NEC-2)

The Numerical Electromagnetics Code (NEC-2) is an interactive FORTRAN

program designed to model the response of antennas and other conducting

structures due to electromagnetic field excitation. Wires and smooth

surface geometries are used to model arbitrary structures in free space

or over a ground plane [22]. NEC-2 uses the method of moments to

numerically solve integral equations that determine the currents induced

on conducting structures by both direct waves and scattered waves.
After calculating the currents on a structure, NEC-2 can determine, at
an arbitrary observation point, the electromagnetic fields radiated by
that structure, regardless of whether the current was induced by a
direct wave or by a scattered wave (see Figure 7) [23]. These
structures, which may be excited or parasitic, are specified by the user
to the program by means of "data cards". A data card may include such
information as the XYZ space coordinates of a structure component, or
may specify a method of excitation, such as an incident plane wave or
voltage source on a wire. A data card may also specify the type of
output to be generated; this may include current and charge density on a
conductor, electric or magnetic fields near a conducting structure, or
radiated fields at observation points in space [24].

NEC-2 uses an integral equation approach to solve for unknowns and is
generally not suitable for simulating a scattering structure that has
dimensions larger than several wavelengths. This limitation exists
because, in the numerical solution of the integral equation, as the size
of a structure increases linearly, the number of unknowns generated by
that structure increases exponentially (by about a factor of N^2).
Hence, while modeling a very large structure is theoretically possible,
solution of the generated matrix equation may require more computer
resource than is practical. Consequently, NEC-2 is not an efficient
code for simulating a conducting structure that has dimensions larger
than several wavelengths [25].
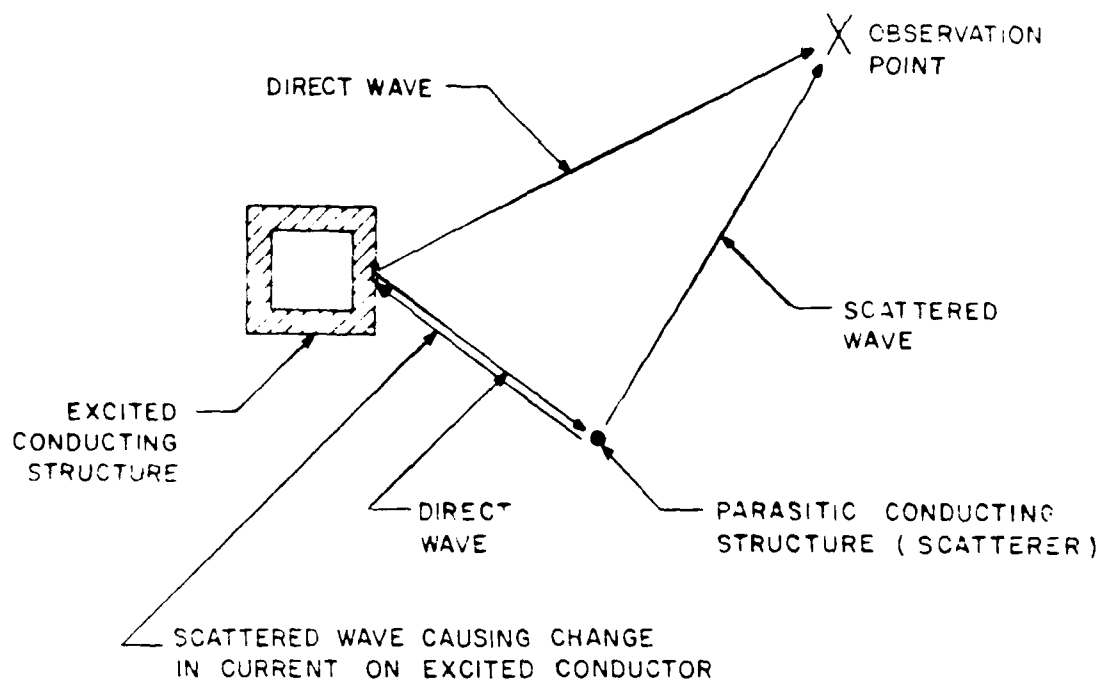
Figure 7: Observed field consisting of direct and scattered waves.

b. An Overview on Modeling Conducting Structures

NEC-2 offers two options for modeling structures: (1) surface patches, and (2) wires. The user may model any structure that can be represented by surface patches and/or wires since the program combines an integral equation for smooth surfaces with an integral equation specialized for wires [26].

Small flat surface patches may be used to model conducting surfaces. Patches should be specified so that they completely cover the surface to be modeled, and, if chosen small enough, may be used to approximate curved surfaces. The program identifies a patch by the XYZ coordinates of its center, by the components of the outward-directed, unit normal vector, and by the patch area. Surface patches are generally restricted to the modeling of voluminous objects (closed surfaces), since patches only model the side of the surface from which their vector normals are directed outward [27].

In wire modeling, a wire may be composed of one or more segments, and is defined by the XYZ coordinates of its two end points and by its radius. To model a structure using wires, wire segments should geometrically follow the contours of the structure being modeled as closely as possible, using a piece-wise linear approximation for curved sections; a wire grid may also be used, in place of patches, to model flat surfaces [28].

A grid of wires appears electrically equivalent to a thin surface conductor if the grid spacing is small compared to the incident field

wavelength. For example, most microwave ovens have a glass door on the front through which the cooking food may be viewed. This glass door is embedded with a wire grid, or screen, while the other five walls of the cooking compartment are made of metal. If the size of the screen mesh is small with respect to the wavelength of the microwaves, which they are, then the screen will reflect the microwaves just as effectively as the metal walls. That is, a grid of wires can have the same electrical characteristics as a thin sheet of metal, the determining factors being the grid spacing and the wavelength.

As an example, suppose the sheet of metal in Figure 8 is to be modeled using the NEC-2 wires option. The first step is to have wire segments follow the outer boundaries of the sheet in a piece-wise linear fashion. Then, construct the interior of the sheet as a grid of perpendicular wires (as shown in Step 2 of Figure 8), with the distance between the wires much less than the wavelength of the incident electromagnetic field.

c. Modeling VOR Components Using NEC-2

(1) The Alford Loop Antenna

A VOR antenna array is composed of four Alford Loop antennas. These four antennas are positioned as shown in Figure 9, with the antennas represented as squares. One of the first assumptions the model makes is that an Alford Loop antenna can be approximated by an excited, square
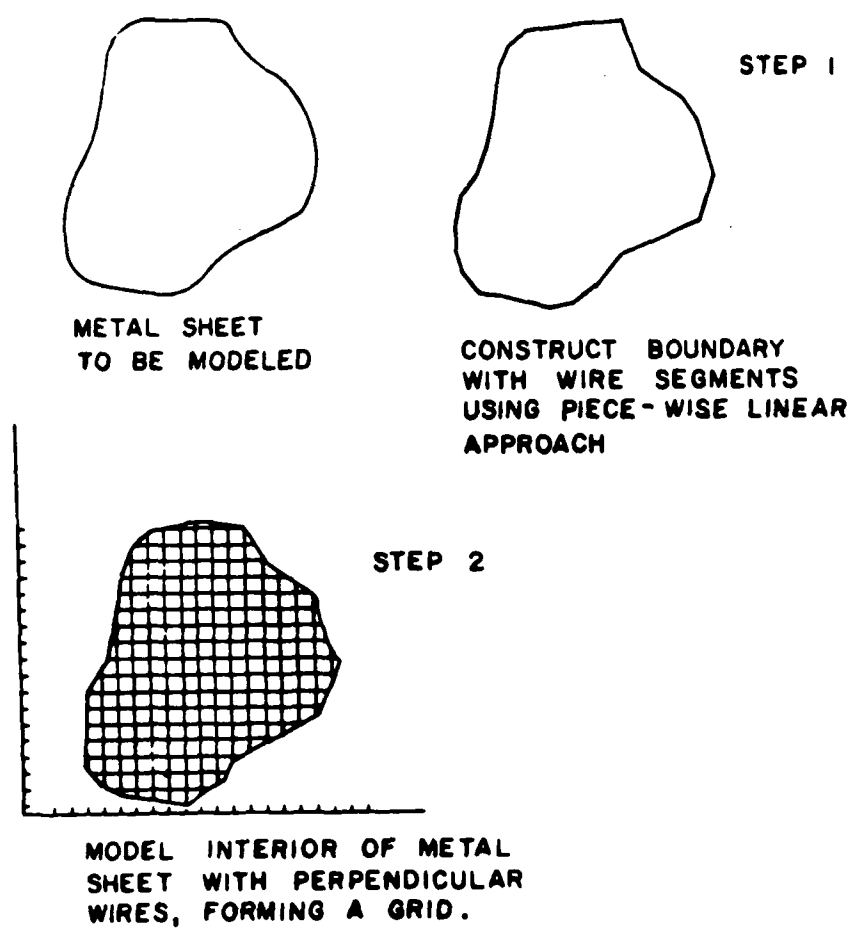
Figure 8: Modeling a sheet of metal with a wire grid.
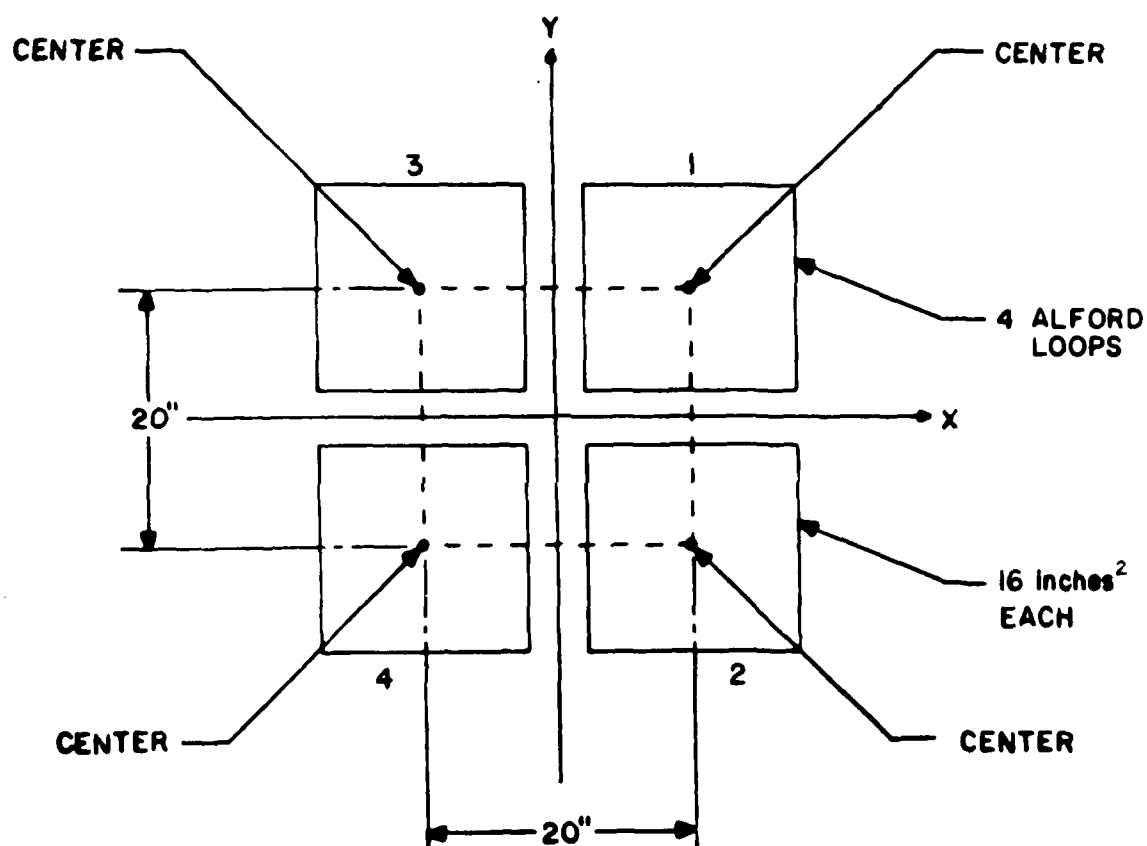
Figure 9. Relative antenna positions in physical VOR array.

loop of thin wire. This assumption is based on the fact that the Alford Loop is designed to approximate the circular radiation pattern of an ideal square loop antenna [29]. Although an ideal square loop is not physically realizable, NEC-2 can model it. And so, as a first attempt, a square loop of thin wire with the approximate the physical dimensions of the Alford Loop (about 20 inches per side) was input to NEC-2. However, the resulting output showed non-uniform current around the circumference of the loop.

In an actual Alford Loop antenna, the distribution of capacitance and inductance on the structure of the antenna enable the current distribution to be constant along the circumference, resulting in the desired circular radiation pattern. Clearly, a thin wire of the same dimensions as the Alford Loop antenna will not have the same current distribution, and hence will not have the same radiation pattern [30].

Previous efforts with NEC-2 aimed at modeling antennas indicate that realistic current distributions can be achieved using the actual dimensions of the antenna structure [32], [33]. However, the focus of this study is to investigate the performance of the VOR in the presence of parasitic scatterers, rather than the radiation pattern of the Alford Loop antenna, which is known to be circular. Thus, a study was undertaken using NEC-2 to determine a simpler, yet realistic, model approximation for the Alford Loop antenna. The most obvious simplification was to approximate the Alford Loop antenna by a smaller loop, constructed from thin wires. Such an antenna would produce the desired circular radiation pattern, although important questions about

the applicability of this approximation needed to be addressed, as is listed below:

(1) Will a loop modeled smaller in radius than the physical radius of an Alford Loop interact with a scatterer in the same way as a loop modeled with the same dimensions of an Alford Loop? That is, even though the different size loops may give identical radiation patterns in the far field, will they continue to do so in the presence of scatterers?

(2) How small should the modeled loop be? What loop size is needed to maintain a constant current around its circumference.

(3) Will a loop modeled as a very thin wire (basically two dimensional) react to scatterers in the same manner as the four inch wide Alford Loop (three dimensional)?

To answer the first question, two loops differing appreciably in radius were used in the following experiment. First, one of the loops was excited and placed near a scatterer. The far field radiation pattern of that loop was then recorded. Next, the other loop antenna of different size was placed in the same position relative to the scatterer as was the first antenna and its far field radiation pattern recorded.

For this experiment, a horizontally polarized, parasitic scatterer was placed in the near field of (1.4 meters away from) an excited square loop of thin wire. The loop had a radius of 0.1 meters and was oriented in the horizontal plane. The resulting radiation pattern was observed

in the far field of the horizontal plane. Each modeled observation

point was six nautical miles from the center of the square loop, and was

rotated five degrees from the previous point, thereby forming a circle

of observation points in the XY plane, six miles in radius. Keeping the

scatterer in the same position, the square loop was replaced with one

that had a radius of 0.007 meters. The same observations as for the

larger loop were made and recorded. The two sets of data were then run

through a cross-correlation program, with the resulting correlation

coefficient being 1.0, indicating that the data were identical.

Conclusion: according to NEC-2, the two above configurations yield

identical far-field results; consequently, it would be appropriate to

use the small loop approximation in this application of NEC-2.

In regard to the size of the modeled Alford Loop antenna, it is

important that antennas used in a VOR navigation system have a circular

radiation pattern because this relates to bearing error. A thin, square

loop antenna gives a circular radiation pattern only if the radius

of the loop is less than 0.05 times the exciting wavelength [33]. A

circular radiation pattern from a thin-wire, square-loop antenna is a

direct result of having constant current around the loop, which in turn

is the result of the loop being small. As the size of one of these

loops is increased, the current does not remain constant, but starts to

vary sinusoidally around the loop, thus distorting the circular

radiation pattern. The radius of a thin-wire, square loop that

approaches the physical dimensions of an Alford Loop would be

approximately 0.254 meters. The VOR frequency modeled has a wavelength

of 2.72 meters, giving a small loop condition of (0.05 * 2.72 =) 0.136
meters. So, as mentioned previously, a square loop of wire with the
same circumference as a physical Alford Loop does not give a circular
radiation pattern since the actual dimensions are considerably greater.

NEC-2 was used to determine the radiation patterns and current
distributions of several "small" square loops of thin wire. Modeled
loop radii were varied from 1.0 meters to 0.007 meters. For loops 0.01
meters in radius and smaller, the modeled current was constant around
the circumference. Figures 10-A, 10-B, and 10-C show the results for
the la_est of the six small-loops modeled. The data points denoted by
x's correspond to a loop radius of 0.1 meters. (The x's in the Current
Phase Distribution graph are partially hidden on the "Current Phase = 90
degrees" line). It should be noted that this is the first loop, from
larger to smaller, to cross the 0.136 meter small-loop boundary, and
that it is also the first loop to give approximate straight lines on
both the Current Magnitude Distribution and the Current Phase
Distribution, indicating an approximate constant current condition.
Based upon these results, a square loop with a side of 0.2 meters (0.1
meters radius) was chosen as being appropriate for VOR modeling
purposes.

The remaining question is whether a loop of thin wire will react to
scatterers the same way as the approximately four inch wide Alford Loop
antenna. To answer this question, an attempt was made to model an
Alford loop antenna in three dimensions, resembling a square doughnut,

Current Magnitude Distributions
on Small Square Loop Antenna
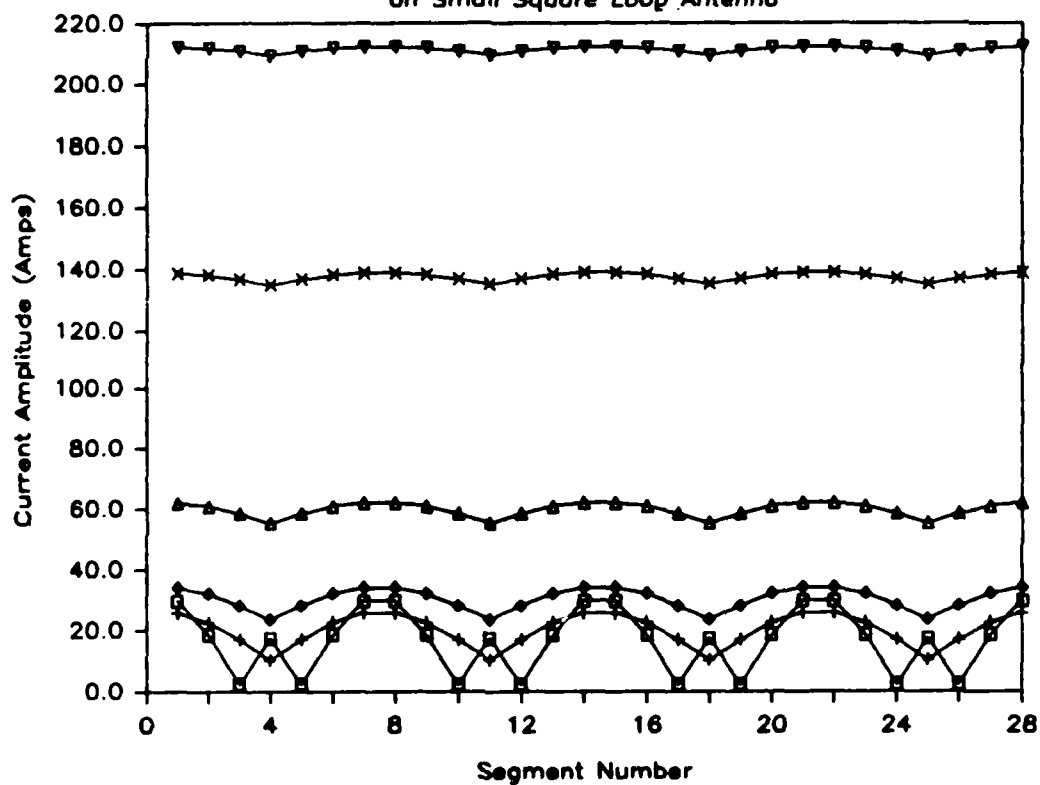
FIGURE 10-A

Current Phase Distributions
on Small Square Loop Antenna

FIGURE 10-5

LEGEND

SMALL SQUARE LOOP ANTENNA
(SEGMENT NUMBERS SHOWN)

NEC VOLTAGE SOURCES

LOOP RADIUS (METERS)

RAD

☐ 1.0
+ 0.50
◇ 0.35
△ 0.20
✕ 0.10
▽ 0.01
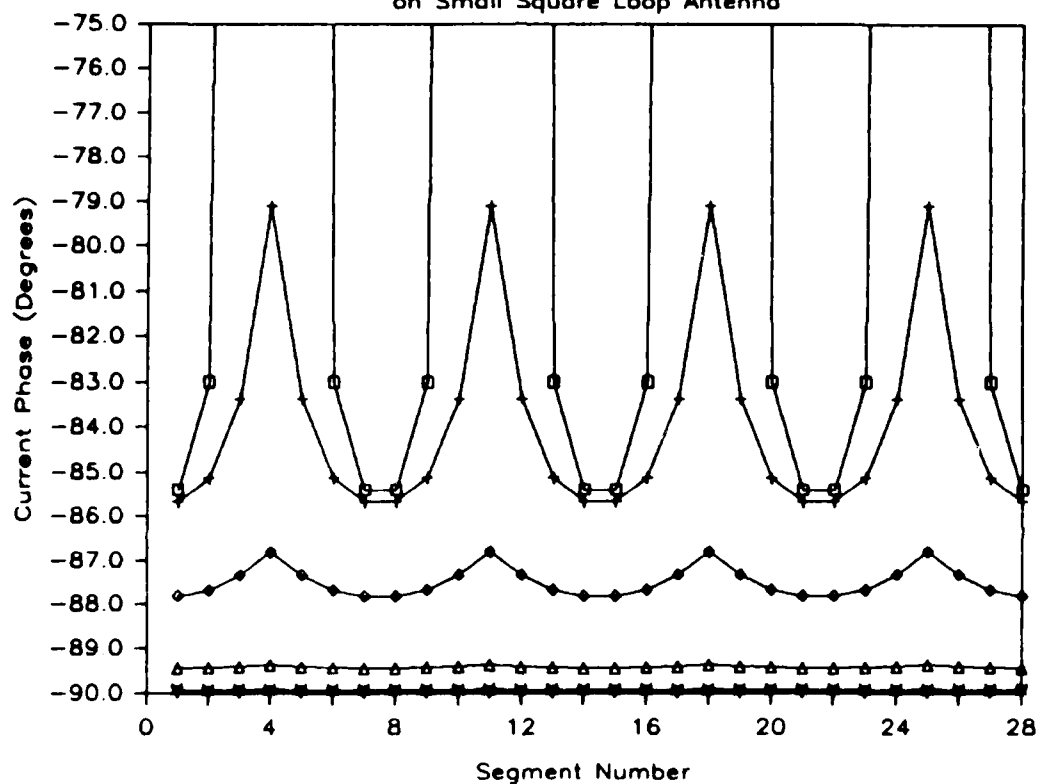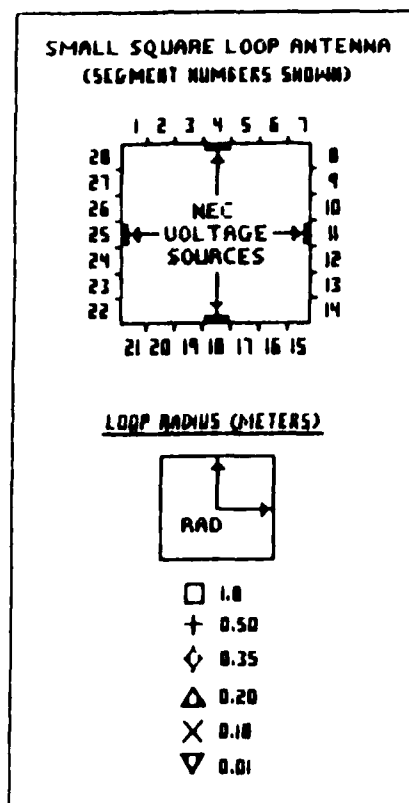
FIGURE 10-C

using the NEC-2 surface patch feature, with the added third dimension

representing width. Voltage sources were provided by attaching

excitation sources to selected patch centers as described in the NEC

user's manual [34]. These patches were chosen so as to give the antenna

a geometrically symmetrical excitation, and the excitation sources were

placed in the interior of the doughnut. (NEC-2 requires voltage source

excitation of patches by connecting source wires to patch centers.)

Without modifying the NEC-2 program, only ten voltage sources are

allowed in any given program execution. In order to get a circular

radiation pattern from this square doughnut loop, the excitation current

must be constant around the outer surface of the loop. However, ten

voltage sources were not sufficient to provide this constant current

condition, even on a very small doughnut. Further, one of the goals in

using NEC-2 for VOR modeling was to not modify the NEC code in any way.

It was desired to use this standard software package without

modification so that the software would not have to be validated again.

For these reasons, the three-dimensional, "wide", Alford Loop model was

abandoned.

The primary difference between using a thin wire approximation for the

Alford Loop and using a more realistic "wide" antenna model as described

above, is that the wire model accounts for currents only in the axial

direction of the wire, whereas a wide antenna model made of surface

patches would account for axial currents and transverse currents [35],

both of which are found on an actual antenna. If transverse currents

are present, they generate electromagnetic fields that interact with

scatterers and may be significant at the observation points in the far
field. However, these fields are vertically polarized and are typically
small in magnitude compared to the horizontal components. In addition,
in a VOR navigation system, the airborne VOR receiving antenna is
horizontally polarized so that the vertical components of the received
signal are approximately 30 dB down from the received horizontal
components [36]. Hence, the receiving antenna effectively filters out
vertically polarized waves. This suggests that ignoring transverse
antenna currents in the model does not affect model accuracy, even if
these currents are comparable in magnitude to the axial currents, which
they are not. Consequently, the omission of transverse antenna currents
in modeling VOR bearing error does not degrade model results.

The experiments using NEC-2 described above indicate that approximating
the Alford Loop antenna by a thin-wire loop of smaller dimensions is
reasonable for the application being addressed. Accordingly, a square
loop antenna, 0.014 meters on a side, comprised of wire elements 0.0005
meters in radius, was used to generate the model results presented in
subsequent sections of this report.

(2) The Counterpoise

In a VOR system, a finite counterpoise is typically located ten feet
above the earth, and is intended to act as a ground plane for the VOR
transmitting antennas. The VOR antennas are usually positioned 4 feet
above this counterpoise, and thus 14 feet above ground level [37]. One
of the assumptions made in the model is that the counterpoise can be

represented as an infinite ground plane. That is, in the model, the
counterpoise is approximated by an infinite, perfectly conducting ground
plane located at ground level. In a physical VOR system, it is the
counterpoise that is attempting to approximate an infinite ground plane.
The antennas of the model are located 4 feet above this counterpoise,
which in this case, is four feet above the ground. If it is desired to
model a 46 foot tower in the vicinity of the VOR, the first 10 feet of
the tower up from ground level are omitted since this is the amount of
tower that would be below the counterpoise in a physical system.

(3) The VOR Modulation Scheme

A VOR antenna system is composed of an array of four Alford Loops being
fed in a time-varying amplitude and phase relationship. The General VOR
model is designed to calculate the received fields from each of the four
antennas individually, to include the effects of parasitic scatterers on
each antenna's radiation pattern using NEC-2, and to subsequently
combine those fields according to the VOR modulating scheme (GVOR), thus
simulating the performance of a VOR in the presence of parasitic
scatterers. The VOR modulation scheme is the method used to generate
the rotating limacon pattern that is indicative of the VOR variable
signal.

The first facet of the modeling job is performed by NEC-2, and its goal
is to assemble the data file that program GVOR processes in the second
part of the job. This data file consists of the calculated fields for
each of the four antennas, scattering effects included. The excited

antenna has a radiation pattern and so does the parasitic scatterer, and NEC-2 calculates these patterns. Actually, NEC-2 calculates the field at user-chosen observation points, not the radiation pattern, although the radiation pattern can be obtained from the calculated fields of many such points. Once the fields from the antenna and the scatterer are calculated for a chosen observation point, NEC-2 uses the superposition principle to determine the resultant fields at that point.

In order to simulate the VOR, the NEC-2 program is run four consecutive times, once for each antenna in the VOR array. All four executions of NEC-2 use the same input data (such as frequency, excitation voltage, data output formats, scatterer location, etc.) except for the position of the square loop antenna. The antenna position is changed each time so that each "program run" analyzes the output of only one antenna in the four antenna array. Figure 11 shows how the modeled Alford loop is positioned for each of the four executions of NEC-2. As in program KCVOR, GVOR analyzes the VOR system at 73 observation points, once every five degrees around the VOR, 0 through 360 degrees inclusive. Since GVOR uses NEC-2's output, these 73 observation points are chosen for NEC-2 field calculations each time NEC-2 is run. These points form a circle in the far field, with the center of the circle being the center of the antenna array.

d. Description of the NEC-2 Output File

The output for a single run of NEC-2 contains more information than is needed for modeling the VOR. At the conclusion of the execution of NEC-
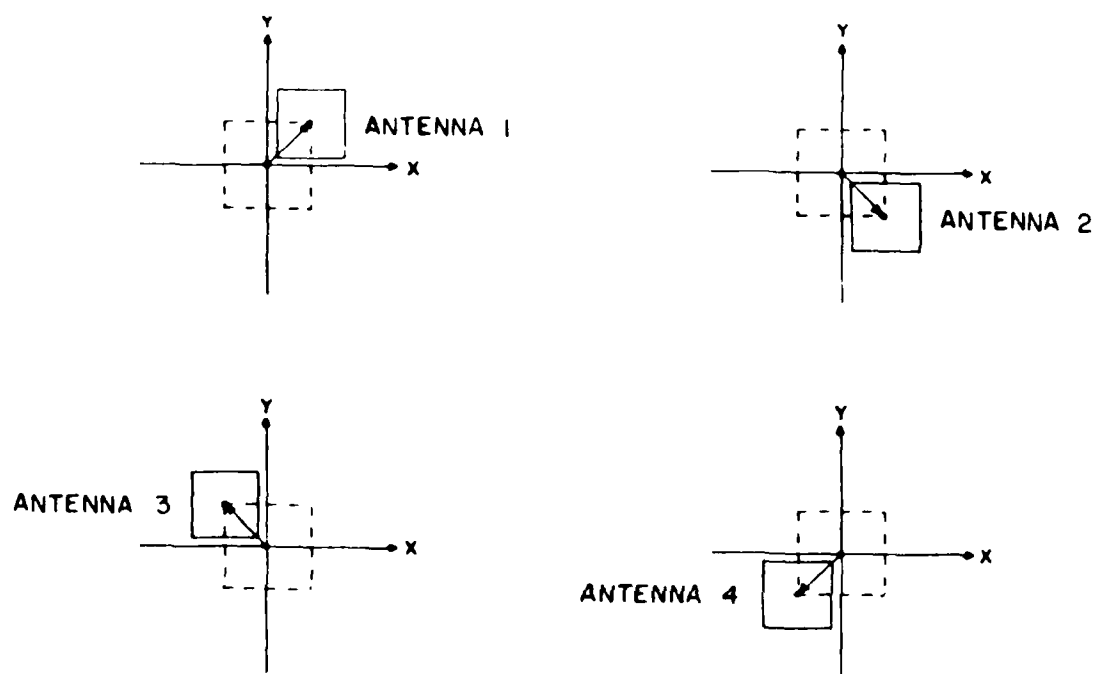
FIGURE 11:   Modeling the VOR Antenna Array with NEC-2

2, the entire output file is written to a disk file called "NEC.DAT".
Since NEC-2 is executed four times in the course of the VOR model,
NEC.DAT eventually contains four similar blocks of data (4 NEC-2 output
files), with the difference between files being that each data block is
based on a different antenna location. The following is a sequential
description of what one NEC-2 output file contains:

(1) A user-entered comment section.

(2) A structure specification section that echos the information given
     to the program as input. This includes the XYZ coordinates of the
     beginning and ending points of each wire specified. Accompanying
     each set of coordinates is the tag number (name) of the wire and
     the number of segments that the wire is divided into. If a
     structure has been moved, the coordinates that were listed on the
     Move Data Card are also given.

(3) The final coordinates of all segment centers are given along with
     each segment's length and radius. A map is also given telling, by
     absolute segment number, which wires have common end points.

(4) All other data input to the program are also listed in the output
     file. Examples are: which segments were excited by a voltage source
     and the magnitude of that excitation; the frequency of excitation;
     the format parameters for calculated values that are to be output;
     whether or not a ground plane was specified, and, if so, what type.

(5) A section on antenna input parameters which gives the voltage, the current, and the impedance of each excited segment.

(6) A section that tells the current on each segment, regardless of whether it was induced or excited.

(7) A section that states the range to the observation point. If the observation point is incremented through a series of angles, the range is an indication of the absolute distance to each observation point.

(8) A section that gives extensive information on the radiation patterns at the chosen observation points.

2. Program GVOR -- Part Two of the "General VOR Model"

The part of the NEC-2 output file on radiation patterns, which is
described in section (8) under "Description of the NEC-2 Output File",
is reproduced as Table 1. Each row of information in this table gives
data for one of the 73 observation points, where the data describe the
complex electric field at the observation point due to one of the four
VOR antennas. For example, Table 1 might represent all of the
observations made on antenna #1. The format of this output is dependent
on the data input to NEC-2, with Table 1 being typical for a run of the
General VOR model. Notice the first column labeled "ANGLES". The
observation points have a constant angle of elevation, theta. However,
the angle phi, which represents the azimuth angle, is stepped in five
degree increments, full circle around the origin, for a total movement
of 360 degrees and a total of 73 data points.

The NEC-2 contribution to the VOR model is the calculation of the
horizontal components of the complex electric fields in regard to the
far field radiation patterns of each of the four elements in the VOR
antenna array. These calculations account for the interactive effects
of a specified scatterer(s) on the radiation pattern of each antenna.
This information, for one of the antennas, is listed in the last column
of Table 1 and is labeled "E(PHI)". When GVOR reads NEC.DAT (the disk
file containing the NEC-2 output) the vertical components of the
radiated electric fields, E(THETA), are neglected. This is because, as
mentioned earlier, airborne VOR antennas are horizontally polarized,
which means that these "real world" antennas effectively ignore the

vertical components of VOR signals. The "POLARIZATION" and "POWER

GAINS" columns are also extra information and are neglected by GVOR.

Only the PHI Angles and the magnitudes and phases of E(PHI) are of

interest to GVOR.

a. The NTG (NEC To GVOR) Subroutine

NTG is a subroutine of GVOR that provides the interface between NEC-2

and GVOR. NTG scans the NEC.DAT disk file for the keyword

"POLARIZATION" (see Table 1), which appears in the range of certain

columns only four times in the entire file -- once for each antenna.

When NTG finds this keyword, it knows it has found the radiation pattern

data for one of the 4 elements in the VOR antenna array. Of these data,

only the azimuth angles of the observation points and the horizontal

components of the electric fields at these observation points are of

value in modeling the VOR. Therefore, NTG reads the PHI angles and the

magnitudes and phases of E(PHI) from the disk file, and then stores this

information in the host computer's memory (as variable arrays) for

future access by GVOR. This process is repeated for each occurrence of

"POLARIZATION", so that when GVOR regains control from NTG, it has

access to the fields radiated by all four antennas, as calculated by

NEC-2. It should be noted that the effects of parasitic scattering are

inherent in the field information at this point. The remaining task for

GVOR is to process this information in such a way that it looks like the

output of a VOR antenna array, rather than the output of four individual

antennas. This is done similar to the way that program KCVOR constructs

the VOR variable signal, which is described in the section "Theory of

Operation for the Basic VOR Model". But GVOR does do some things differently, and those differences are discussed below.

b. Processing the NEC-2 Data

When NTG retrieves the data from NEC-2, it retrieves 4 sets of 73, 73 observation points for each of four antennas. As the VOR signals are constructed, GVOR accesses these data as 73 sets of 4. It takes the output of all four antennas for a particular observation point, and provides the time-varying amplitude and phase relationship necessary for a VC signal.

The horizontal components of the radiated, complex, electric fields are output by NEC-2 in polar form. Fortran-77 handles complex numbers in Cartesian form, so GVOR's first processing task is performing a polar to rectangular conversion on all the retrieved fields data. After this is done, the main program loop is entered for one of 73 executions. Here, the VOR signals are constructed for one of the observation points by using the output of the four individual antennas simultaneously.

GVOR calculates the observation points that were input to NEC-2. Hence, before it begins signal construction for a particular observation point, it compares the expected azimuth angle with the value that is read in by NTG, to ensure that the data retrieved are the data expected. If the angles do not match, an error message is sent to the user and program execution is terminated; otherwise, processing continues. It should be noted that up to this point the main difference between programs GVOR

and KCVOR is that GVOR obtains its information on the VOR antenna fields from NEC-2 (scattering included), whereas KCVOR calculates this information itself (scattering not included).

As the processing continues, signal construction and analysis of the VOR variable signal is conducted in the exact same way as it is in program KCVOR. Although the antenna fields are supplied to GVOR by NEC-2, these antenna outputs are phased together and analyzed with the same routines that are used in KCVOR; even the same FFT routine is used. The two programs differ, however, when it comes to the VOR reference signal.

In KCVOR, the radial distance R is subtracted out in the "normalization" of the signal path lengths for each antenna, and thus R has no effect on the phase of the VOR variable signal. So, all that KCVOR has to do in terms of the reference signal is to choose a phase for this signal so that the variable signal and the reference signal are in phase at 0 degrees azimuth (with respect to time = t_o); there is never any need to construct the reference signal. In GVOR, however, the propagation paths are not normalized because NEC-2 handles all of the calculations for the radiated fields, thereby necessitating the construction of the VOR reference signal.

A VOR reference signal has a circular radiation pattern which is centered on the VOR, and although its phase varies with R, it is independent of the azimuth angle. Each antenna in the modeled VOR array possesses the characteristics of a VOR reference, except that its radiation pattern is not centered on the VOR. But if the outputs of the

FIGURE 12

REFERENCE SIGNAL
THE COMPOSITE SIGNAL FORMED FROM
THE SUPERPOSITION OF THE INDIVIDUAL
ANTENNA'S RADIATION PATTERNS.

RADIATION PATTERN OF ONE ANTENNA
THIS CIRCULAR PATTERN IS FED IN PHASE
WITH THE OTHER THREE CIRCULAR PATTERNS
TO FORM THE REFERENCE SIGNAL. THE FOUR
ANTENNAS ARE REPRESENTED AS SQUARES.
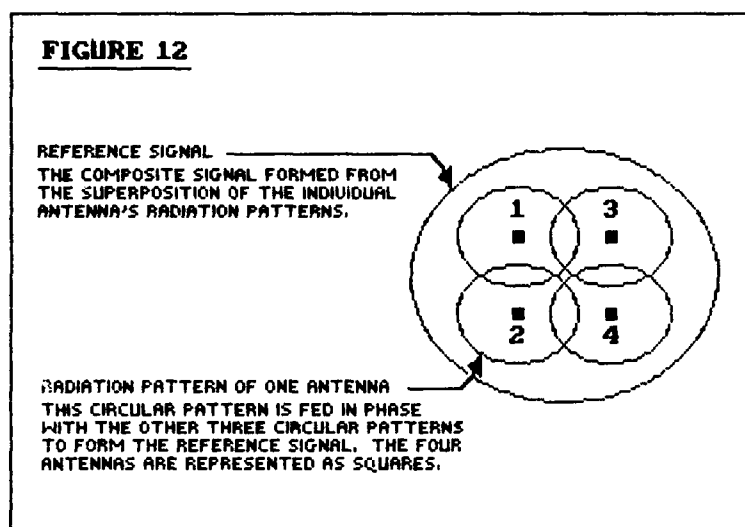
four antennas are added together in phase, in the far field it appears
as if the composite pattern is a reference signal centered on the VOR.
And so this is how GVOR models the reference signal. When the four
antennas are observed in the far field, they appear as one point
source radiating from the origin. Figure 12 gives an idea of how
symmetry helps in the construction of the reference signal.

GVOR calculates the reference signal's phase, and then proceeds to find
the omnicourse of the observation point using the equation:

COURSE [deg] = PHASE OF VARIABLE SIGNAL - PHASE OF REFERENCE SIGNAL + 45

The addition of the 45 degrees accounts for the initial phasing of the
tone wheel and the goniometer on the 30 [rev/sec] motor shaft. In a
real VOR system, the tone wheel generates the reference signal and the
goniometer generates the variable signal, and both of these devices are
driven by the same motor as described previously. The initial phasing

between these signal generators is needed so that the reference signal and the variable signal are in phase at 0 degrees azimuth [38].

GVOR then proceeds to determine the error between the computed bearing angle of the observation point (the omnicourse) and the point's actual position. The calculated bearing angle is subtracted from the "true" bearing angle to get the error incurred in VOR signal transmission modeling. The true bearing angle is known from the overall design of the program -- one observation point for every five degrees around the VOR. The azimuth angle of all observation points are exact multiples of 5 degrees, and the multiple that is of present interest to GVOR is already kept track of in the program because the antenna information retrieved from NEC-2 is indexed by "true" azimuth angle.

GVOR concludes one iteration of the main program loop by outputting the true azimuth angle, the derived azimuth angle (the omnicourse), and the error between the two. This output is sent to the user in just the same way as it is sent from KCVOR.

III. RESULTS

The results of the modeling effort are presented in the same sequence
that the VOR model is presented. That is, first, the results obtained
from model KCVOR are presented, along with explanation of how it was
determined that this model operates properly. An understanding of
KCVOR's results gives the reader the necessary background for
interpreting the results of model GVOR. Next, the baseline output from
GVOR (no scatterers) is presented and compared to KCVOR's output.
Following is an evaluation of GVOR's performance with respect to
measured data.

A. Model KCVOR

Model KCVOR shows itself to be operating properly by its correct
estimation of octantal error and system response to variations in the
VOR antenna patterns. Octantal error is an inherent and periodic
bearing error that makes four cycles within the 360° of azimuth about
the VOR array, with its name being derived from the presence of eight
error peaks. Generally, octantal error is present to some degree in all
VOR's, with +/- 0.6° peak error not unusual. However, as is discussed
later, octantal error is a controllable quantity, and KCVOR has verified
that this error can be reduced to +/- 0.0004° peak by using textbook
antenna pattern values.

In the original KCVOR model, the horizontal radiation pattern of the
Alford Loop antenna was assumed to be isotropic. However, due to a
proximity effect in the actual VOR array, there are induced currents

caused by mutual coupling between antennas, which tends to alter the shape of the composite radiation pattern. In particular, the figure-eight pattern of a radiating pair (which is the composite pattern of two phased, individual antennas) becomes elliptical in shape, rather than circular. Octantal error results because the four lobes radiated from the two radiating pairs of a VOR array are non-circular. It is possible to cause the four lobes of the two figure-eight patterns to be more circular by making the individual VOR antennas radiate elliptical patterns, rather than their assumed circular patterns. The result is the minimization of octantal error. If the lobes can be adjusted so that they are perfectly circular, then octantal error will no longer exist [39].

When the original KCVOR output its first error curve, it was sinusoidal in nature, with eight peaks through the 360° of azimuth, with each peak +/- 0.55°. This was recognized to be octantal error particularly since the peak modeled error values were typical for VOR facilities.

Reducing octantal error in an actual VOR usually involves a tradeoff, because other errors are often created in the process. However, created errors such as these are not a problem in a computer model since antenna patterns can be defined explicitly. Hence, a test for validation of the modeling concept was to reduce octantal error by specifying antenna patterns known to reduce this error.

In Appendix B there is a program listing called KCVOR-M, where the M stands for modified. The modifications that were made to KCVOR

introduced two "ellipse" factors, which, when multiplied by the individual antenna patterns, cause composite radiation patterns that are elliptical in shape. The purpose in doing this was to emulate the effects on Alford Loop radiation patterns that are achieved by adjustments to its endplates. These adjustments are known to affect the circularity of the radiation pattern, and are used by VOR technicians to reduce octantal error. In the model, one of the ellipse factors is applied to the antennas in radiating pair #1, and the other is applied to radiating pair #2. The program modifications were made so that the optimum ellipse factors could be determined. Since a circle is a special case of an ellipse, it also possesses an ellipse factor, as defined by model KCVOR-M, a factor of 1.0. It was found that lowering the ellipse factor for one antenna pair, and then increasing the factor for the other pair by the same amount, produced the desired effect. The two optimum ellipse factors that were found were in the neighborhood of AEF=0.9608 and BEF=1.0392. The modeled VOR system response to the variations in the antenna patterns by ellipse factors AEF and BEF was a reduction in octantal error from +/- 0.55° to +/- 0.0004°. The correct response of the model to variations in the Alford Loop antenna patterns, indicates that the modeling approach is valid.

B. Model GVOR

1. Baseline model output (no scatterer) -- a comparison with KCVOR

Before introducing parasitic scatterers as another variable into the modeling process and attempting to accomplish all VOR model objectives

at once, attention was focused on mating KCVOR with NEC-2 to produce a general VOR model named GVOR. The initia' goal was to generate results using GVOR, in the absence of parasitic scatterers, that would be comparable to the results obtained from KCVOR; namely, the output should show the presence of an octantal error curve approximately +/- 0.6° peak. This section describes the results obtained from GVOR with no scatterers present.

Figure 13 shows the output obtained from GVOR when parasitic scatterers were not included in the modeled scenario. As seen in the figure, this is a typical octantal error curve, in shape and in magnitude with the peak error being +/- 0.51°. This encouraging result compares well with KCVOR's result of +/- 0.55° peak error, and indicates that the model is functioning properly in the absence of scatterers.

2. Modeled results of horizontally polarized parasitic scatterers and a comparison with measured data

Figure 14 shows two parasitic scatterers that were modeled by GVOR. These structures, which are made of 3/4 inch diameter copper tubing, were chosen to be modeled because they were used in an earlier study to collect measured data from a VOR faci ,y that had these scatterers on the radome of the VOR. This earlier study, entitled *Assessment of Correlation Between Second Generation VOR Monitoring and the VOR Signal in Space*, was performed by Ohio University's Avionics Engineering Center [40]. Data for this study were obtained for the purpose of determining the correlation between the near-field signals at the Remote Maintenance

BEARING ERROR FOR MODELKCVOR

Baseline Output -- Dotantal Error Curve

"True" Azimuth Angle in Degrees

Azimuth Angle Error in Degrees
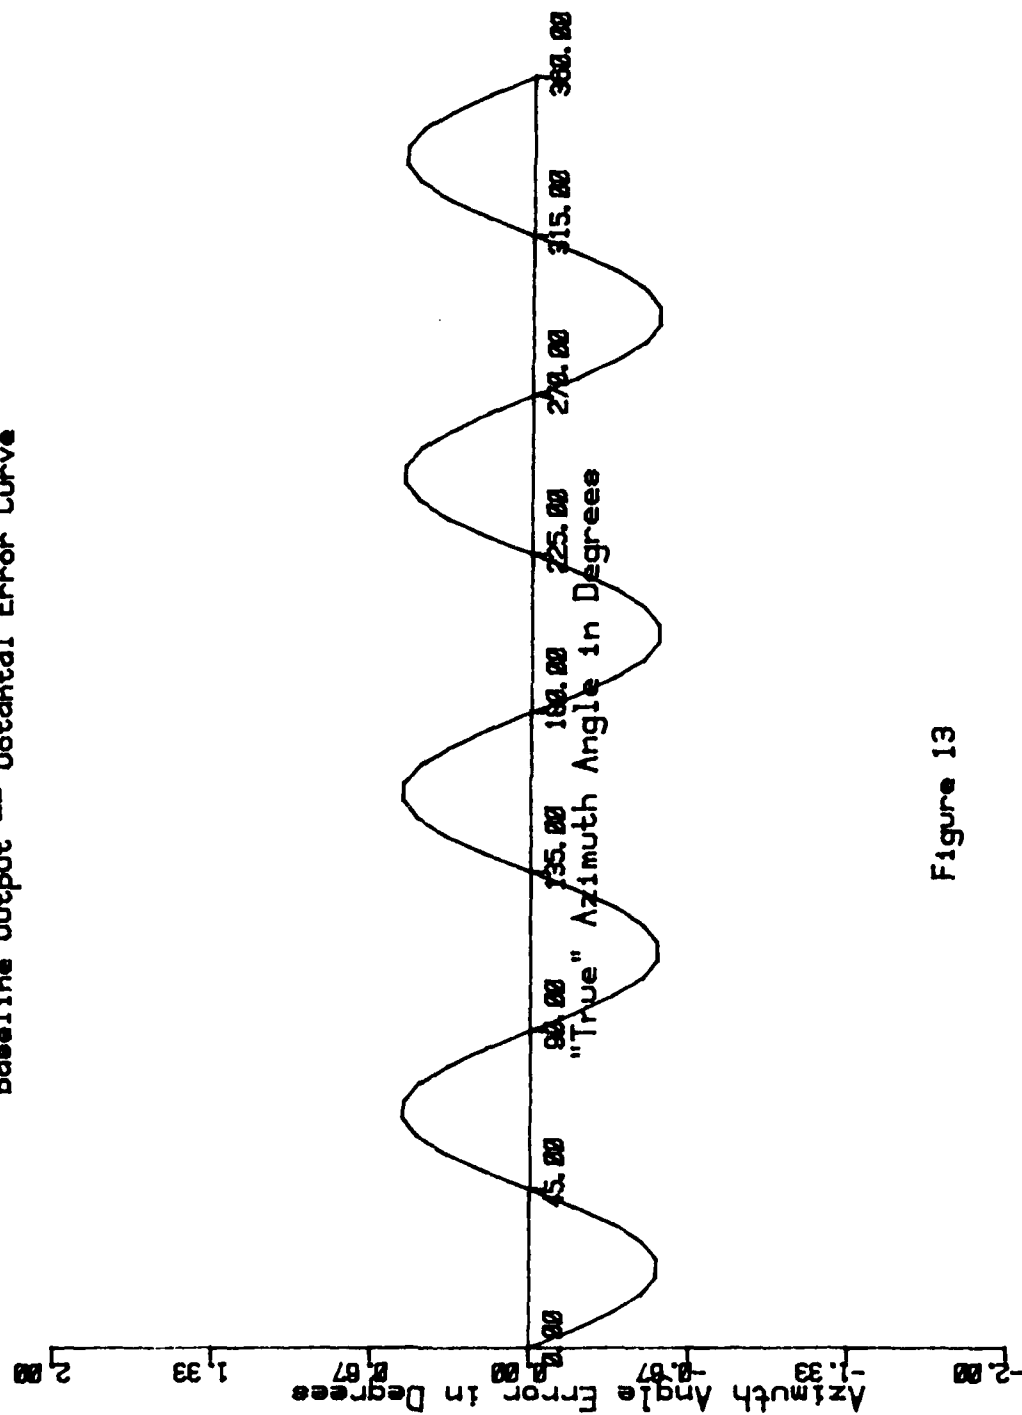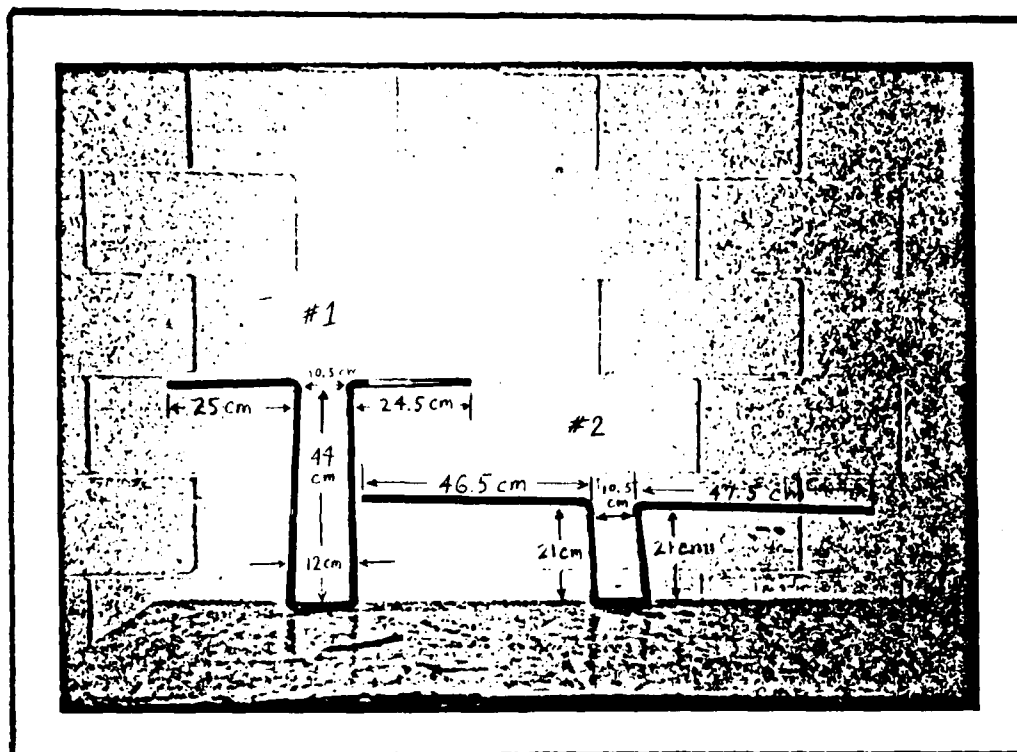
Figure 13

Two Parasitic Scatterers Modeled by GVOR

Figure 14

Monitor (RMM) system and the far field signals at an observation tower
and at airborne locations.

The dimensions of the scatterers in Figure 14 were input to NEC-2
according to the conventions specified in the NEC-2 User's Guide for
modeling wire structures. Only one scatterer was modeled at a time, and
that scatterer was positioned relative to the VOR antennas as docu ented
in the forementioned study. Measured airborne VOR data were collected
with the scatterer placed on the VOR radome so that it was oriented
horizontally. VOR error data were collected for the scatterer at
various heights on the radome, and at different azimuth angles.

Figures 15 through 20 show modeled versus measured data. Each figure
indicates which scatterer was used, where it was located, and the range
of the observation points. Table 2 gives the peak to peak VOR error for
each of the six figures and for each set of data in those figures. In
Figure 15 the general trends and peak to peak values of the two measured
data sets (RMM and tower) are about the same, and the modeled data shows
just as much agreement. In Figure 16 the peak to peak values for the
airborne and modeled data agree very well, while the RMM peak to peak
value is substantially less; in regards to the trends (oscillations),
the RMM data match up consistently with the airborne data, while the
modeled data shows a little lesser agreement.

At this point, a few words are needed about the measured data. For
Figures 15 through 19, the two sets of measured data in each figure
theoretically should correlate highly; but, as can be seen, sometimes

BEARING ERROR FOR MODEL GVOR

Azimuth Angle Error in Degrees

"True" Azimuth Angle in Degrees

RMM · · · · ·
TOWER − − − −
MODEL ──────

Figure (5) VOR errors due to parasitic scatterer No.(1): the scat-
terer was located on the 45 degree radial, mounted on the
Radome, 72 inches above the counterpoise. The solid curve
is model generated data. The dotted curve is data measured
using the RMM system. The dashed curve represents data
collected from a mobile tower, located 800 feet in radius
from the VOR system. Theta = 89.00 degrees.

Figure 16 VOR errors due to parasitic scatterer No.(2): the scatterer was located on the 288 degree radial, mounted on the Radome, 48 inches above the counterpoise. The solid curve is model generated data. The dotted curve is data measured using the RMM system. The dashed curve represents data collected airborne, where R=6Nmi. and is the distance from the VOR system to the airplane. Theta = 82.94 degrees.
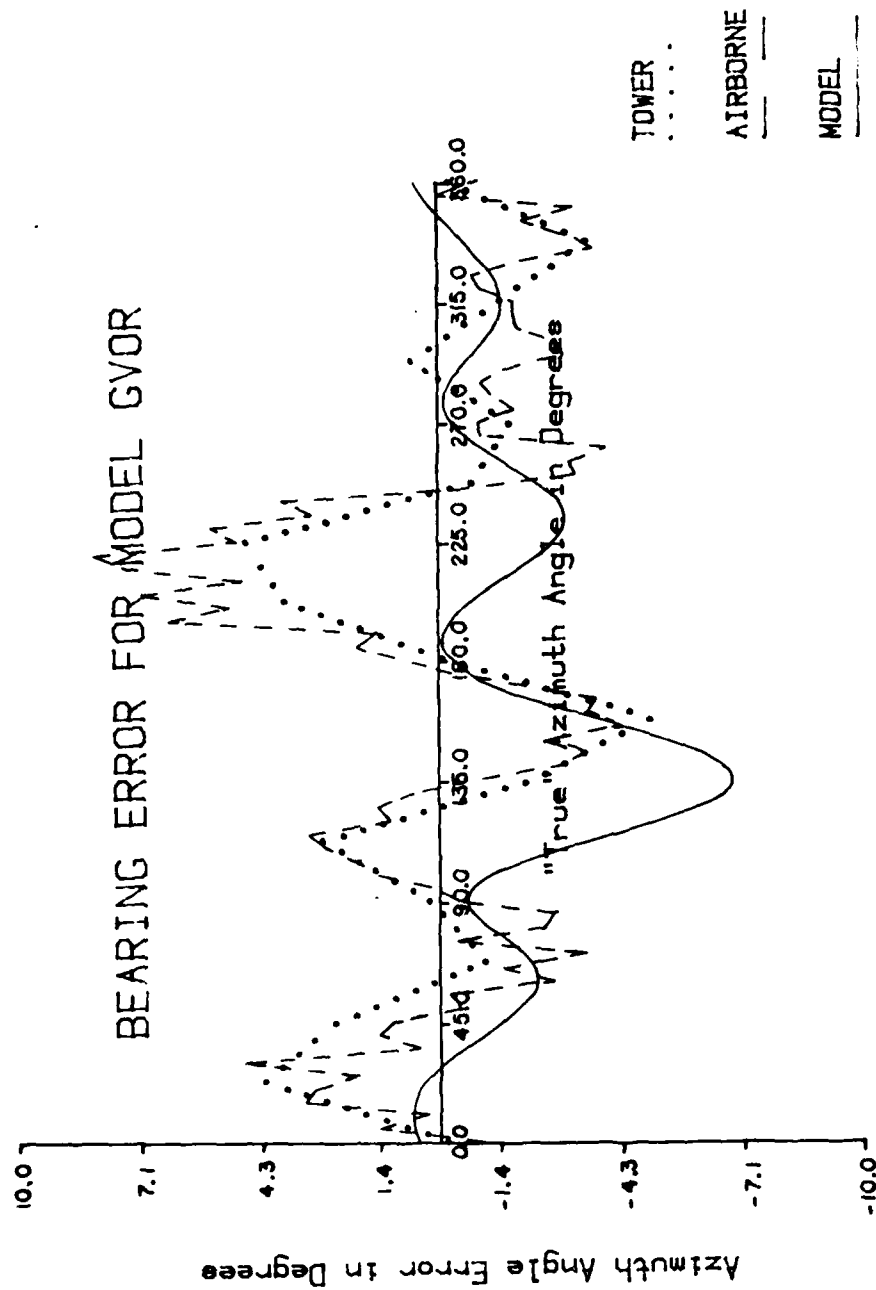
Figure 17 VOR errors due to parasitic scatterer No.(1): the scatterer was located on the 0 degree radial, mounted on the Radome, 72 inches above the counterpoise. The solid curve is model generated data. The dotted curve is data collected from a mobile tower, located 800 feet in radius from the VOR system. The dashed curve represents data collected airborne, where R=6Nmi. and is the distance from the VOR system to the airplane. Theta = 82.94 degrees.

Figure 18 VOR errors due to parasitic scatterer No.(2): the scatterer was located on the 0 degree radial, mounted on the Radome, 24 inches above the counterpoise. The solid curve is model generated data. The dotted curve is data collected from a mobile tower, located 800 feet in radius from the VOR system. The dashed curve represents data collected airborne, where R=6Nmi. and is the distance from the VOR system to the airplane. Theta = 82.94 degrees.

BEARING ERROR FOR MODEL GVOR

TOWER – 288 deg
· · · ·

TOWER – 45 deg
————

MODEL – 0 deg
————
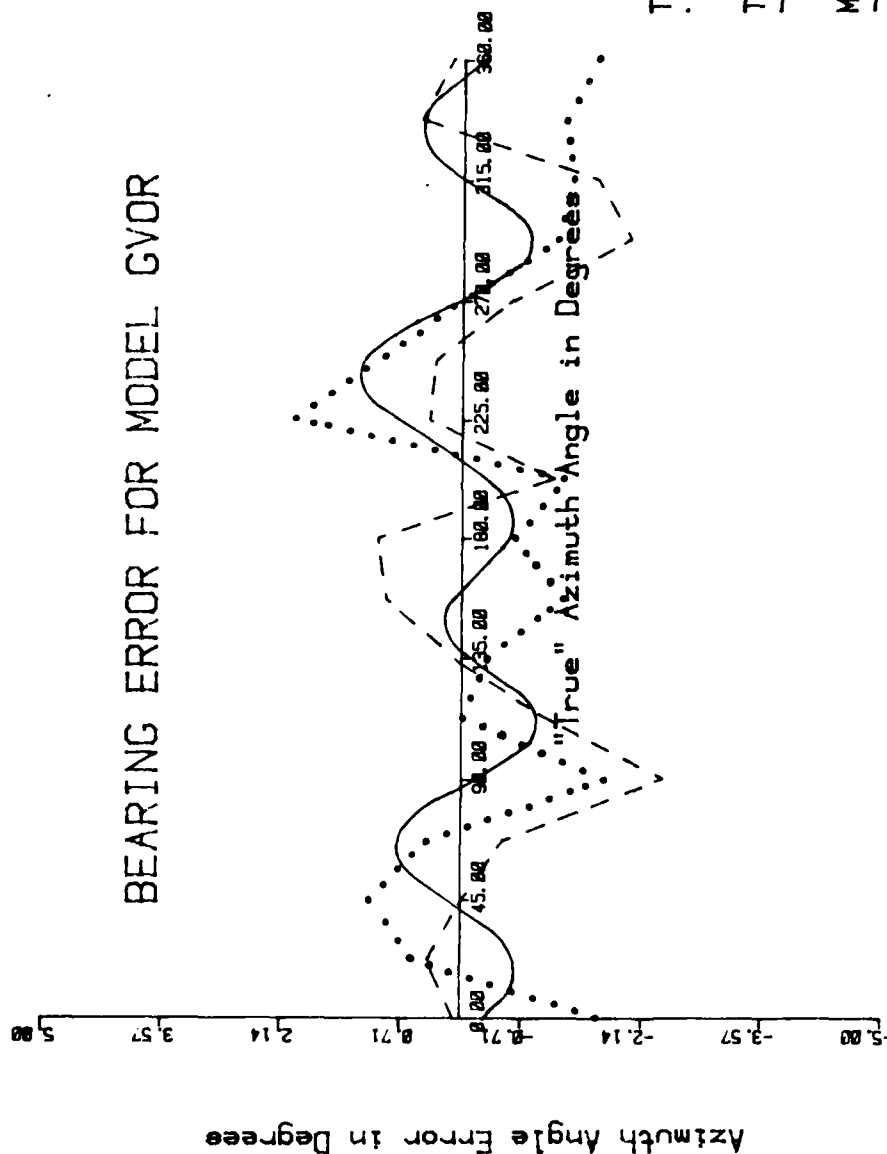
Figure 19   VOR errors due to parasitic scatterer No.(1): the scat-
terer was mounted on the Radome, 72 inches above the coun-
terpoise. The solid curve is model generated data. The
dotted curve represents data collected from a mobile tower,
located 800 feet in radius from the VOR system. This
dotted data was generated with the scatterer positioned on
the 288 degree radial. The dashed curve also represents
tower data, but with the scatterer lying on the 45 degree
radial. The dotted and dashed curves have been phase-
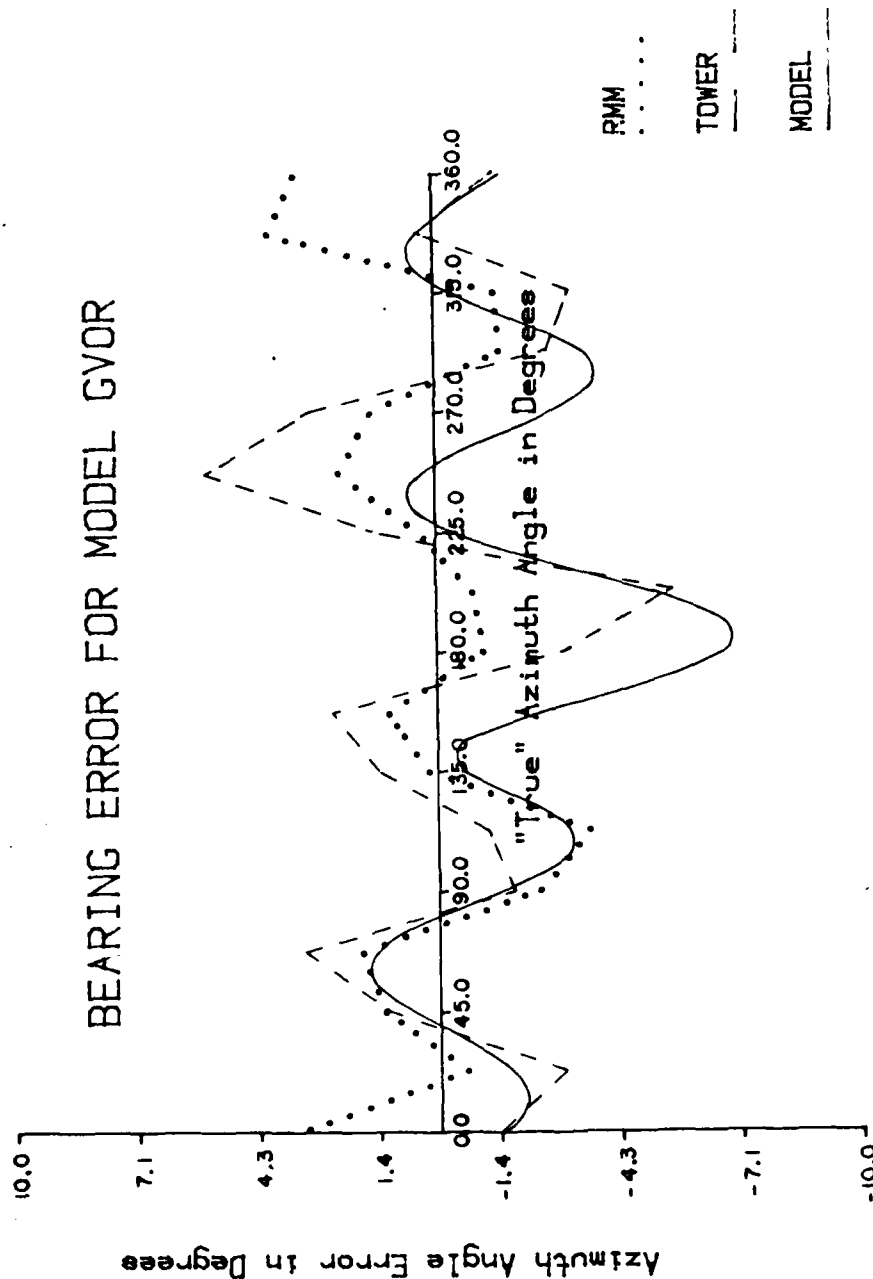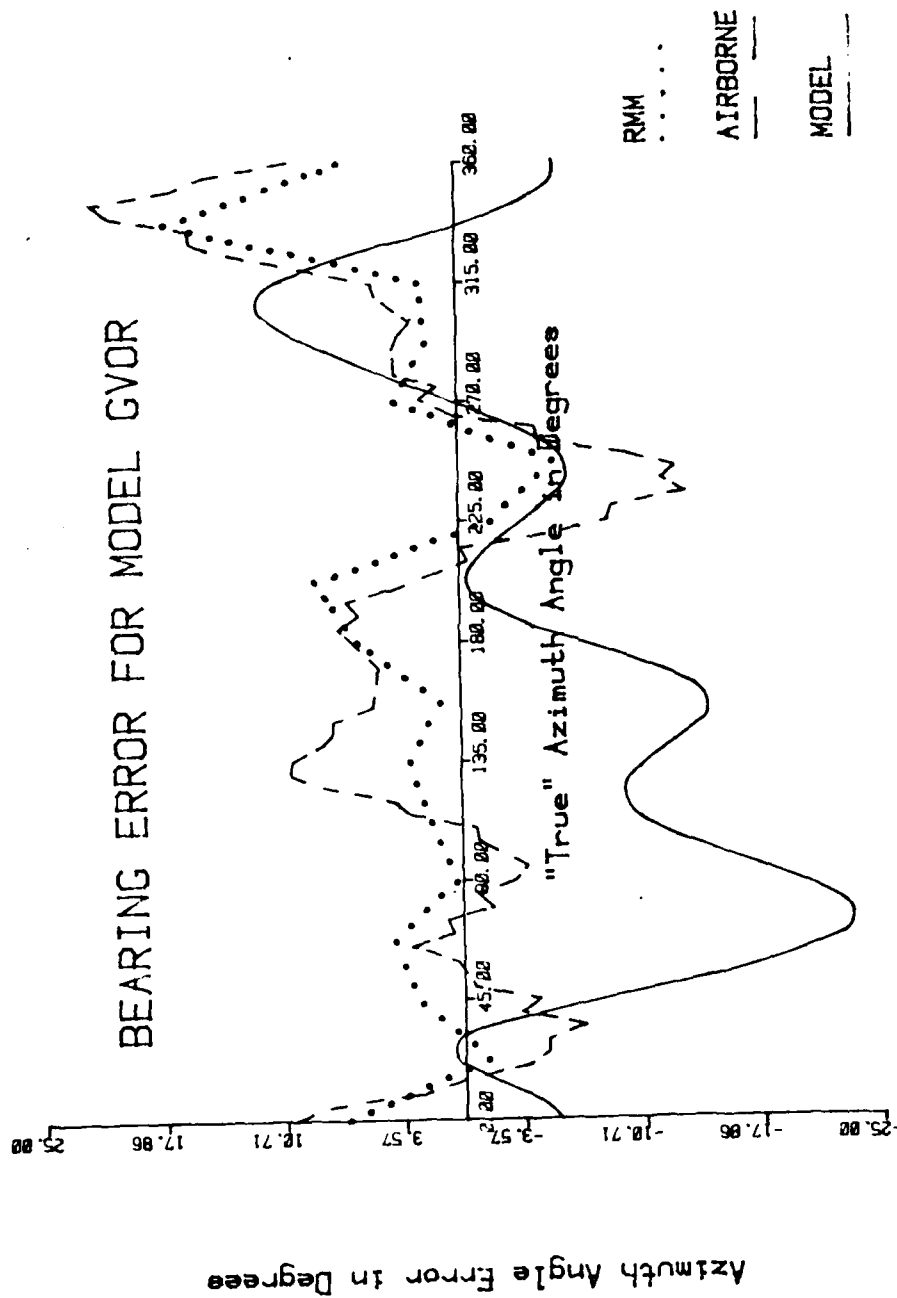shifted to a reference of 0 degrees in radial.
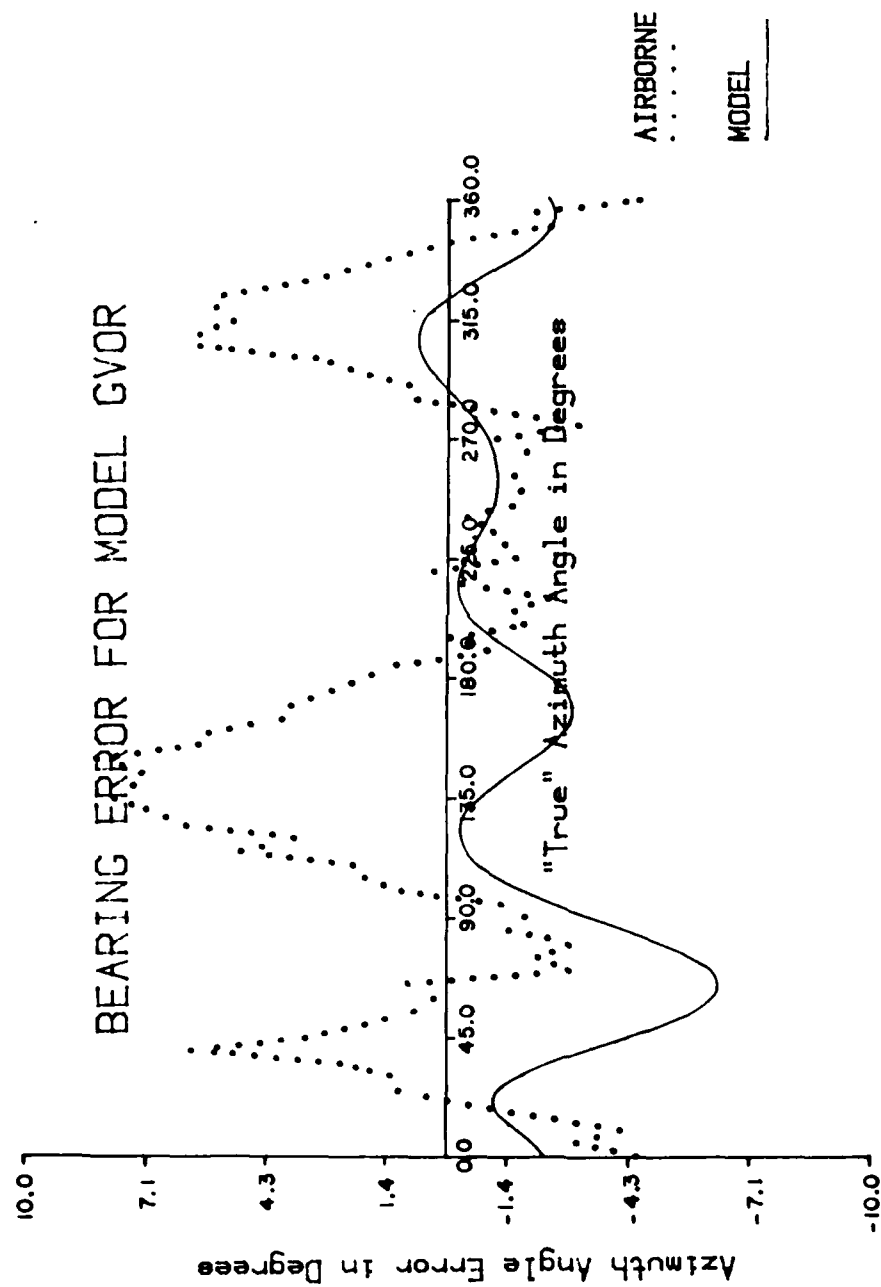
Figure 20 VOR errors due to parasitic scatterer No.(1): the scatterer was located on the 288 degree radial, mounted on the Radome, 72 inches above the counterpoise. The solid curve is model generated data. The dotted curve is airborne collected data, where R=6Nmi. and is the distance from the VOR system to the airplane. Theta = 82.94 degrees.

| | | PEAK TO PEAK VOR ERROR | | | |
FIG. #	CONFIG.	MODEL	Rmm	TOWER	AIRBORNE
1	SCAT #1 45° 72" Hi	8.77	7.59	11.10	-----
2	SCAT #2 288° 48"Hi	35.33	22.99	-----	35.30
3	SCAT #1 0° 72" Hi	7.63	-----	9.70	12.70
4	SCAT #2 0° 24" Hi	7.03	-----	8.00	14.60
5	SCAT #1 228° 24" Hi	2.11	-----	3.70	-----
5	SCAT #1 45° 24" Hi	2.11	-----	3.40	-----
6	SCAT #1 288° 72" Hi	7.15	-----	-----	13.00

TABLE 2

they correlate well and other times they do not. This indicates that
some error is present in the measured data. However, this error is not
gross, and the measured data can confidently be used to get a general
feeling for the shape of the error curve. And in all 6 figures, the
modeled data displays the same general curvature as the measured data,
indicating that model GVOR can account for the effects of horizontally
polarized parasitic scatterers. It should be noted that when the
measured data shows high correlation for a particular figure (using
Table 2 and visual judgement on the figure), the modeled data also shows
good agreement. But at this point a quantitative evaluation is not made
due to the limited amount of measured data.

Figure 19 deserves some special attention. Although the two measured
data sets were both collected from the far-field tower, one was with the
scatterer positioned on the 288° radial, and the other was with the
scatterer on the 45° degree radial. As indicated in the study for which
the measured data were collected, the effect of rotating the scatterer
around the radome "x" number of degrees was a phase shift in the error
curve in the direction of rotation by "x" degrees. That is, if a data
set was collected with the scatterer at 0° azimuth, and then a data set
was collected with the scatterer at 45° azimuth, the two data sets would
correlate highly when the latter set is phase shifted forward 45°.
Therefore, the measured data in Figure 19 were confidently phase shifted
to correspond to the scatterer being positioned at 0° azimuth, which is
where the scatterer was located for the modeled data. It is worth
mentioning that the modeled data also displayed the characteristic that

a rotation of scatterer position only resulted in the rotation of
generated data.

3. Modeled results of vertically polarized parasitic scatterers

Vertically polarized parasitic scatterers were input to the VOR model,
via NEC-2, in the form of straight wires placed perpendicular to the
plane that holds the four VOR antennas. The results were identical to
those obtained from the baseline model with no scatterers present. This
was expected since GVOR completely ignores vertically polarized currents
or fields. Recall that NTG , a GVOR subroutine, only reads in the
horizontal components of electric field from NEC-2, so as to emulate the
horizontally polarized VOR receiving antennas of aircraft.

IV. RECOMMENDATIONS

It is felt that the modeling approach used to create GVOR is valid due to the model's reasonable comparison against available measured data. However, for those interested in pursuing further development of this model, some suggestions are offered that may further enhance the results.

After the modeled results presented in previous sections were obtained, the model was modified to include the other three antennas as parasitic scatterers. In each of the modified program runs, one of the antennas is excited as usual, but all four antennas representing the VOR array are present. The goal is to account for any scattering effects neglected due to modeling the scatterer in the presence of only one antenna at a time. The appropriate modifications were made to the baseline model and to the scattering model. After both models were run, the output of the baseline model was subtracted from the output of the scattering model, leaving only the error due to scattering. This procedure, subtracting out the VOR baseline error, was performed on all the scattering data presented in this report.

Figures 21 and 22 illustrate the results obtained from the modified model, and correspond to the configurations used to obtain figures 15 and 18, respectively. It is evident that after the implementation of the above mentioned modifications the modeled data compares even more favorably with the measured data. However, after inspection of the

BEARING ERROR FOR MODEL GVOR

Corresponds to Figure 15
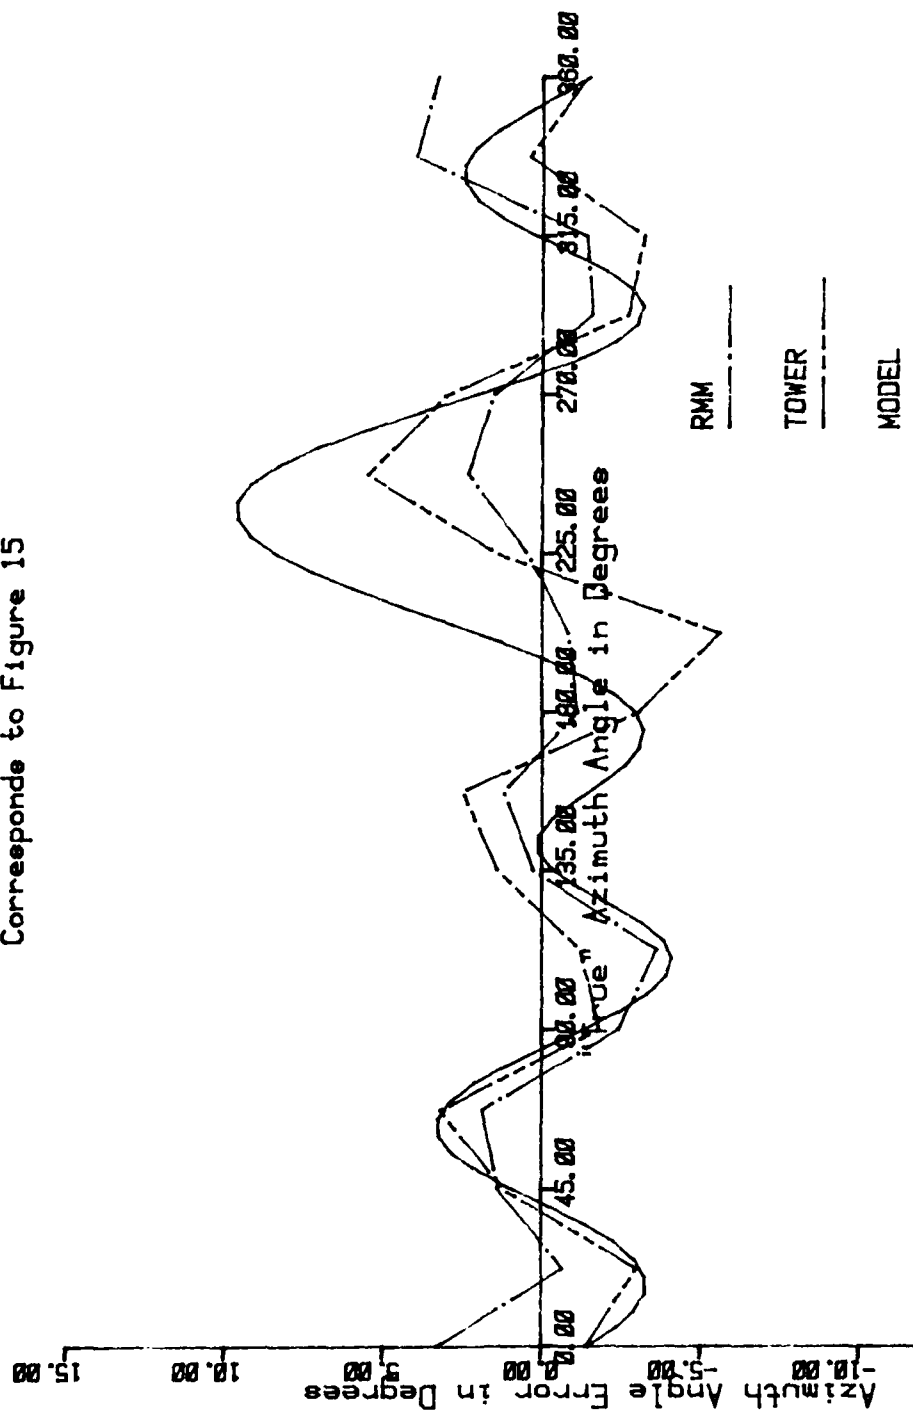
FIGURE 21

BEARING ERROR FOR MODEL GVOR

Correeponds to Figure 18

Tower _____

Airborne _____

Model _____
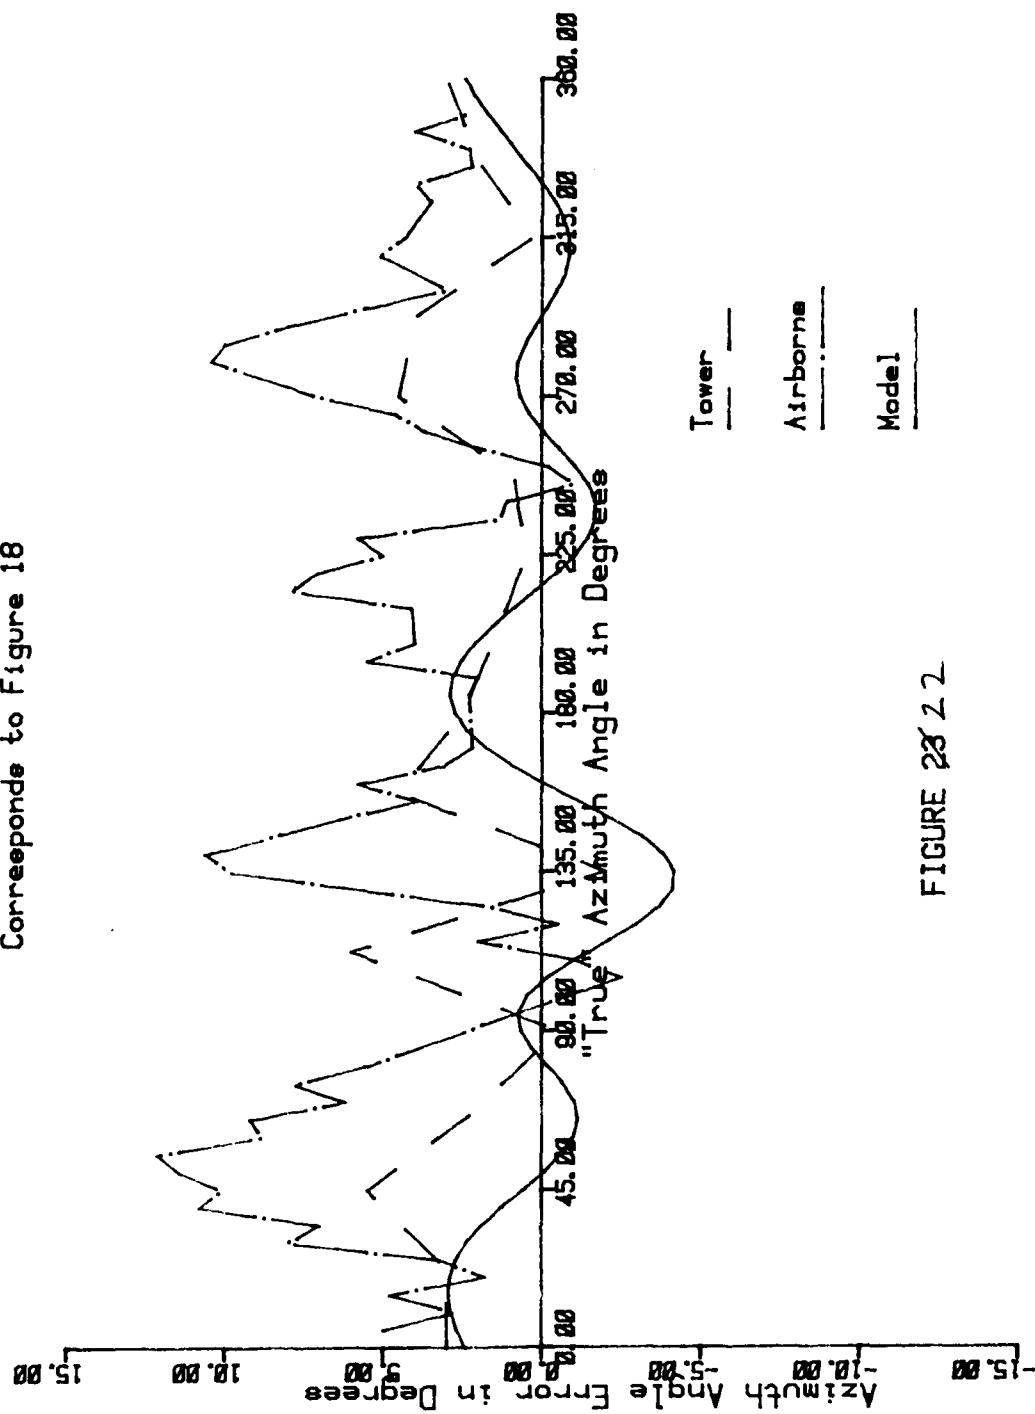
FIGURE 23 22

output from the baseline configuration (see Figure 23), it was decided not to present these modifications in the body of this report. The reason is that the author could not explain the negative bias displayed in this octantal error curve, especially after considering the highly symmetric nature of the VOR system. Additional work might be directed at finding a theoretical explanation for this phenomenon.

Also, for the further development of this model, it is recommended that the model be tested for several different scatterer configurations and then compared against measured data that represent these new configurations. It is emphasized that quality measured data are essential to any further model development. If good agreement is not found between the modeled and measured data, then other areas that may be looked into are:

1. Modification of the NEC.2 code so that a three dimensional model of the Alford Loop could be obtained.

2. Using NEC-2 to model the VOR counterpoise rather than proceeding with the infinite, perfectly conducting, ground plane approximation.

3. Incorporate the vertical field components output by NEC-2 into model GVOR, and adjust their magnitude in program GVOR to reflect a 30 dB. drop from that of the horizontal components, rather than neglecting the vertical field components all together.

BEARING ERROR FOR MODEL GVOR

Baseline Output -- Octantal Error Curve
When 1 antenna is excited, other 3 are scatterers.
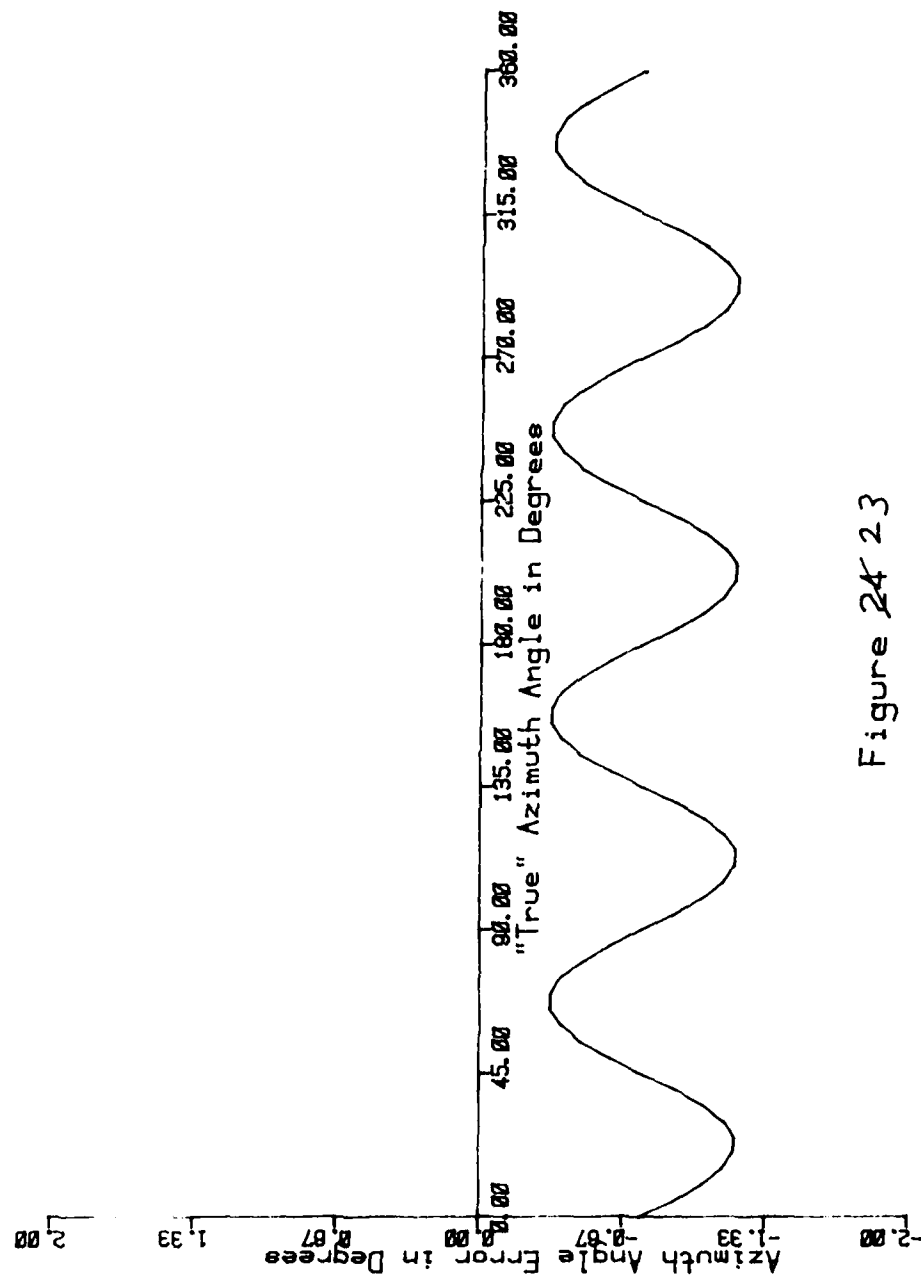
Figure 24 23

V. ACKNOWLEDGEMENTS

VI. REFERENCES

[1] G. J. Burke and A. J. Pogio, *User's Guide to the Numerical Electromagnetics Code (NEC) - Method of Moments*, San Diego, California: Naval Ocean Systems Center, Technical Document 116, 3 vols., January 1981, vol. 1, pg. 1.

[2] *1st Annual Review of Numerical Electromagnetics Code (NEC) Applications*, Livermore, Ca: Lawrence Livermore National Laboratory, Proceedings, March 1985.

[3] F. J. Deadrick, G. J. Burke, and A. J. Poggio, *Computer Analysis of the Trussed-Whip and Discone-Cage Antennas*, Livermore, Ca: Lawrence Livermore National Laboratory, report, January 1977.

[4] Allen W. Glisson and Donald R. Wilton, *Numerical Procedures for Handling Stepped-Radius Wire Junctions*, San Diego, Ca: Naval Ocean Systems Center, report, March 1979.

[5] Jerry Burke, Telephone conversation focusing on successful applications of NEC-2, Livermore, Ca: Lawrence Livermore National Laboratory, personal communication, 4 PM EST, October 23, 1985.

[6] Jeff Dennis and Robert Redlich, *Assessment of Correlation Between Second Generation VOR Monitoring and the VOR Signal in Space*, Athens, OH: Ohio University Avionics Engineering Center, Technical Report EER-74-1, March 1985.

[7] Federal Aviation Administration, *Very High Frequency Omnirange*, Oklahoma City, Oklahoma: FAA Aeronautical Center, Manual FV-201-1, October 1969, Ch. 1, pg. 1.

[8] *Ibid*, Ch. 1, pg. 1-3.

[9] *Ibid*, Ch. 3, pg. 16-19.

[10] *Ibid*, Ch. 1, pg. 3.

[11] *Ibid*, Ch. 1, pg. 3.

[12] *Ibid*, Ch. 1, pg. 4.

[13] *Ibid*, Ch. 1, pg. 1-3.

[14] *Ibid*, Ch. 7, pg. 21-24.

[15] *Ibid*, Ch. 1, pg. 10.

[16] *Ibid*, Ch. 3, pg. 9-25.

[17] Alan V. Oppenheim and Ronald W. Schafer, *Digital Signal Processing*, Englewood Cliffs, New Jersey: Prentice-Hall, Inc., 1975, Ch. 6, pg. 290-294.

[18] Wai-Kai Chen, *Linear Networks and Systems*, Monterey, California: Brooks/Cole Engineering Division, 1983, Ch. 8, pg. 325-333.

[19] Alan V. Oppenheim and Ronald W. Schafer, *op. cit.*, pg. 290-299.

[20] Federal Aviation Administration, *op. cit.*, Ch. 2, pg. 5, Ch. 3, pg. 23.

[21] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 1, pg. 9-31.

[22] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 2, pg. 1.

[23] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 1, pg. 75-78.

[24] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 2, pg. 14-89.

[25] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 1, pg. 1.

[26] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 2, pg. 1.

[27] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 2, pg. 6-11.

[28] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 2, pg. 3-6.

[29] Federal Aviation Administration, *op. cit.*, Ch. 7, pg. 19-21.

[30] Constantine A. Balanis, *Antenna Theory - Analysis and Design*, New York, NY: Harper & Row, Publishers, Inc., 1982, Ch. 5.

[31] F. J. Deadrick, G. J. Burke, and A. J. Poggio, *Computer Analysis of the Trussed-Whip and Discone-Cage Antennas*, Livermore, Ca: Lawrence Livermore National Laboratory, report, January 1977.

[32] Jerry Burke, Telephone conversation focusing on successful applications of NEC-2, Livermore, Ca: Lawrence Livermore National Laboratory, personal communication, 4 PM EST, October 23, 1985.

[33] Constantine A. Balanis, *op. cit.*, Ch. 5., pg. 181.

[34] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 2, pg. 7-8.

[35] G. J. Burke and A. J. Pogio, *op. cit.*, vol. 2, pg. 3,8.

[36] Federal Aviation Administration, *op. cit.*, Ch. 7, pg. 57.

[37] George Sakai, Telephone conversation, Washington, D.C.: Federal Aviation Administration, personal communication, May 8, 1985.

[38] Federal Aviation Administration, *op. cit.*, Ch. 2, pg. 5.

[39] Federal Aviation Administration, *op. cit.*, Ch. 7, pg. 25-31.

[40] Jeff Dennis and Robert Redlich, *Assessment of Correlation Between Second Generation VOR Monitoring and the VOR Signal in Space*, Athens, OH: Ohio University Avionics Engineering Center, Technical Report EER-74-1, March 1985.

VII. APPENDICES

A. Algorithm for Calculating the Received Time-Domain VOR Signal

B. Code Listings

1. KCVOR (circular radiation patterns from transmitting antennas)

2. KCVOR-M (modified to simulate elliptical radiation patterns)

3. GVOR

4. NECIN.DAT (NEC-2 input for baseline VOR -- no scatterers)

5. NECSCIN.DAT (NEC-2 input for VOR + scatterer configuration)

C. User's Section

APPENDIX A

Algorithm for Calculating the Received Time-Domain VOR Signal

Figure A1: GEOMETRY FOR ANALYZING VOR SIGNAL PROPAGATION
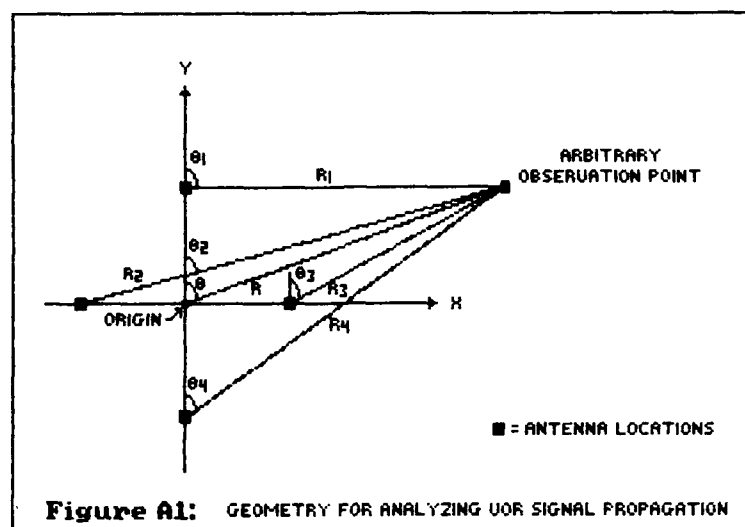
Figure A1 shows a geometry that can be used to determine the composite field radiated by the VOR at an arbitrary observation point. To calculate the phase of the field from antenna "n", the following equation is used:

$$\textbf{phase}_n = \textbf{e}^{-j\beta R_n} \tag{A.1}$$

where "n" is the antenna number, beta is the phase constant, and R_n is the distance between the antenna to the observation point. The distance between the phase center and the observation point is R, as shown in Figure A1.

A far-field approximation is eventually assumed so that the 1/R field-strength-terms for each of the four signals can be considered equal, and so the navigational data is contained in the phase terms of these signals. For this reason, the antenna fields are represented by their phase terms only.

The received field due to the VOR variable signal is given by:

$$CREC = CREF + [CP1 * \sin \omega t] + [CP2 * \cos \omega t] \qquad (A.2)$$

where CREC is the complex-valued received field, CREF is the reference signal, CP1 is the signal from antenna pair #1, and CP2 is the signal from antenna pair #2. The sine and cosine terms account for the 90° phase difference between the two goniometer output lines as discussed in section B-1 of *Model Development*. These two terms when added together form the VOR composite sideband (see Figure A2). The composite sideband has a figure-eight radiation pattern which rotates in azimuth at 30 revolutions per second, and which, when added to CREF, results in a limacon radiation pattern (see Figure A3) about the VOR that also rotates at 30 revolutions per second.

Using equation (A.1), equation (A.2) can be expanded as follows:

$$CREF = \sum_{i=1}^{4} e^{-j\beta R_i}$$

$$CP1 = \left(e^{-j\beta R_1} - e^{-j\beta R_4}\right)$$

$$CP2 = \left(e^{-j\beta R_3} - e^{-j\beta R_2}\right)$$

so that

$$CREC = \sum_{i=1}^{4} e^{-j\beta R_i} + \left(e^{-j\beta R_1} - e^{-j\beta R_4}\right) \sin \omega t$$
$$+ \left(e^{-j\beta R_3} - e^{-j\beta R_2}\right) \cos \omega t$$

or, re-writing:

$$CREC = e^{-j\beta R_1}\left(1 + \sin \omega t\right) + e^{-j\beta R_2}\left(1 - \cos \omega t\right)$$
$$+ e^{-j\beta R_3}\left(1 + \cos \omega t\right) + e^{-j\beta R_4}\left(1 - \sin \omega t\right)$$

Figure A4: GEOMETRY FOR ANALYZING VOR SIGNAL PROPAGATION USING FAR FIELD APPROXIMATION
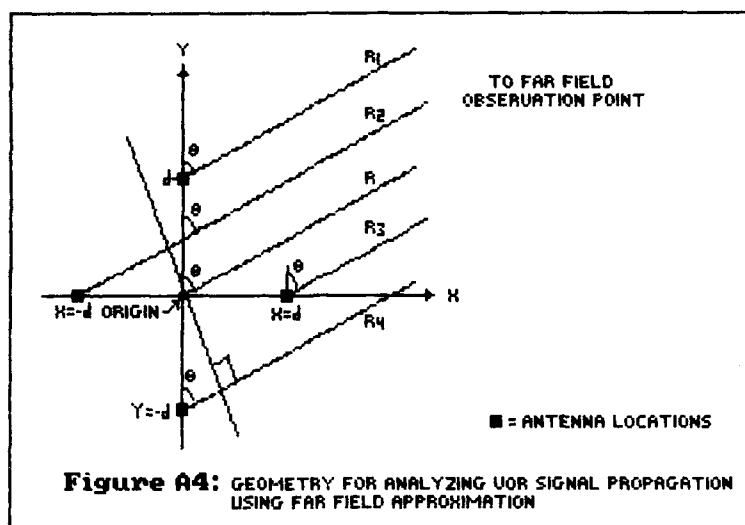
Assuming far field observations, Figure A1 can be approximated by Figure A4. By applying basic trigonometry to Figure A4, it can be shown that:

$$R_2 = R + d * \sin\theta$$
$$R_3 = R - d * \sin\theta$$
$$R_1 = R - d * \cos\theta$$
$$R_4 = R + d * \cos\theta$$

(A.3.1-4)

Equations (A.3.1-4) can be rewritten as:

$$R_2 = R + R_b = R + d * \sin\theta$$
$$R_3 = R - R_c = R - d * \sin\theta$$
$$R_1 = R - R_a = R - d * \cos\theta$$
$$R_4 = R + R_d = R + d * \cos\theta$$

(A.4.1-4)

where R_a through R_d represent the "normalized" ranges for antennas 1 through 4, respectively.

Substituting equations (A.4.1-4) into the last equation for CREC, the following are obtained:

$$CREC = e^{-j\beta(R+R_a)}(1+\sin\omega t)$$
$$+ e^{-j\beta(R+R_b)}(1-\cos\omega t)$$
$$+ e^{-j\beta(R+R_c)}(1+\cos\omega t)$$
$$+ e^{-j\beta(R+R_d)}(1-\sin\omega t)$$

$$CREC = \left\{ e^{-j\beta R_a}(1+\sin\omega t) + e^{-j\beta R_b}(1-\cos\omega t) \right.$$
$$\left. + e^{-j\beta R_c}(1+\cos\omega t) + e^{-j\beta R_d}(1-\sin\omega t) \right\} e^{-j\beta R} \qquad (A.5)$$

Note that if R is subtracted from R_n, where n equals 1 through 4, before CREC is calculated, the result would be:

$$R_1 - R = R_a \qquad R_3 - R = R_c$$
$$R_2 - R = R_b \qquad R_4 - R = R_d$$

$$CREC = e^{-j\beta R_a}(1+\sin\omega t) + e^{-j\beta R_b}(1-\cos\omega t)$$
$$+ e^{-j\beta R_c}(1+\cos\omega t) + e^{-j\beta R_d}(1-\sin\omega t) \qquad (A.6)$$

Comparing equations (A.5) and (A.6), it becomes evident that the process of "normalizing" the range vectors is equivalent to setting R=0 in equation (A.5).

Note that R >> R_a, R_b, R_c, R_d. By normalizing the range vectors, the constant phase shift introduced by the $e^{-j\beta R}$ term is set to 0 degrees

(exactly), independent of the value of R used. Therefore, by
normalizing the range values, errors due to computing complex
exponentials with large arguments are reduced significantly.

Appendix B

Code Listings

```
C                    *** PROGRAM KCVOR ***
C
C                       Paul R. Barré
C                       1 JUNE 1986
C
C       THIS PROGRAM MODELS THE VOR NAVIGATION SYSTEM
C
C       THE AZIMUTH IS INCREMENTED IN 5-DEGREE STEPS FROM 0
C       TO 360 DEGREES.  FOR A GIVEN AZIMUTH ANGLE, TIME IS
C       INCREMENTED FROM 0 TO 1/30 SECONDS IN 256 STEPS.
C
C       A FAST FOURIER TRANSFORM IS USED TO DETERMINE THE PHASE
C       OF THE RECEIVED 30 HZ SIGNAL.  THE ERROR IS THEN CALCULATED
C       USING THE DIFFERENCE BETWEEN THE AZIMUTH AND THE PHASE OF
C       THE 30 HZ SIGNAL.
C
C       MMPLOT IS THEN USED TO PLOT ERROR VS. AZIMTUH
C
C       THIS VERSION USES A DOUBLE PRECISION FFT ROUTINE
C
C       THE FFT ROUTINE(DPFFT) MUST BE PASSED THE REAL AND
C       IMAGINARY COMPONENT ARRAYS AND THE NUMBER OF DATA
C       POINTS AS A POWER OF 2 (I.E. FOR 256 DATA POINTS, 8 IS
C       PASSED TO THE FFT ROUTINE, 256=2**8).
C
C
        IMPLICIT COMPLEX*16 (C)
        IMPLICIT REAL*8 (A,B,D-H,O-Y)
        DIMENSION XR(256),XI(256)
        DIMENSION C(4),XA(4),YA(4),RA(4),CE(4)
        DIMENSION ZXP(73),ZYP(73)
C
C        SET CONSTANTS
C
        DATA VC/3.D8/,FREQ/115.D6/,D/0.656D0/,R/5000.D0/
        DATA XA/0.D0,-.199D0,.199D0,0.D0/,YA/.199D0,0.D0,0.D0,-.199D0/
        PI = DARCOS(-1.D0)
        BETA = (2.D0*PI*FREQ)/VC
        OMEGAM = 2.D0*PI*30.D0
C
C       OUTSIDE LOOP INCREMENTS AZIMUTH ANGLE IN 5 DEGREE STEPS
C
        DO 30 IAZ = 1,73
        AZ = DFLOAT(IAZ-1)*5.D0
        AZR = AZ * PI/180.D0
C
C       FIND X,Y COORDINATES
C
        X = R*DSIN(AZR)
        Y = R*DCOS(AZR)
```

```
C          THIS LOOP CALCULATES THE NORMALIZED DISTANCE (RA) FROM EACH ARRAY
C          ELEMENT TO THE OBSERVATION POINT.
C
           DO 10 I = 1,4
           RA(I) = DSQRT((X-XA(I))**2+(Y-YA(I))**2) - R
           C(I) = DCMPLX(0.D0,-BETA*RA(I))
           CE(I)=CDEXP(C(I))
10         CONTINUE
C
C          FORM RADIATING PAIRS
C
           CP1 = CE(1) - CE(4)
           CP2 = CE(3) - CE(2)
C
C          CYCLE TIME FROM 0 TO 1/30 SECONDS IN 256 STEPS
C
           DO 20 INC = 1,256
           T = DFLOAT(INC-1)/(256.D0*30.D0)
           CREF = DCMPLX(0.D0,2.D0)
C
C          CALCULATE RECEIVED FIELD FOR GIVEN TIME AND POSITION
C
           CREC(INC) = CREF +  CP1*DSIN(OMEGAM*T) + CP2*DCOS(OMEGAM*T)
           XR(INC) = DREAL(CREC(INC))
           XI(INC) = DIMAG(CREC(INC))
20         CONTINUE
C
C          CALL FAST FOURIER TRANSFORM ROUTINE
C
           CALL DPFFT(XR,XI,8)
C
C          LOOK THE 30 HERTZ COMPONENT AND DETERMINE THE PHASE AND MAGNITUDE
C
           NI = 2
           VAZ = DATAN2(XI(NI),XR(NI))*(180.D0/PI)
C
C          ADJUST PHASE SO ALL VALUES ARE BEWTEEN 0 AND 360 DEGREES
C
           IF(VAZ.LT.0.D0) VAZ = VAZ + 360.D0
C
C           CALCULATE ERROR BETWEEN AZIMUTH ANGLE AND RECEIVED PHASE
C
           ERROR = AZ - VAZ
           ZXP(IAZ)=AZ
           ZYP(IAZ)=ERROR
           PRINT 2, AZ,VAZ,ERROR
2          FORMAT(1X,3F15.5)
30         CONTINUE
           CALL MMPLOT(ZXP,ZYP,73,1,ZXLAB,ZYLAB)
           STOP
           END
```

```fortran
C
C
      SUBROUTINE DPFFT(FR,FI,K)
      IMPLICIT REAL*8 (A-H,O-Z)
C - FAST FOURIER TRANSFORM USING TIME DECOMPOSITION
C - DATA IS IN FR (REAL) AND FI (IMAGINARY) ARRAYS.
C - COMPUTATION IS IN PLACE, OUTPUT REPLACES INPUT
C - NUMBER OF POINTS MUST BE 2**K
C - FR(N) AND FI(NE MUST BE DIMENSIONED IN MAIN PROGRAM
      DIMENSION FR(1),FI(1)
      N=2**K
      MR=0
      NN=N-1
      DO 2 M=1,NN
      L=N
    1 L=L/2
      IF(MR+L.GT.NN) GO TO 1
      MR=MOD(MR,L)+L
      IF (MR.LE.M) GO TO 2
      TR=FR(M+1)
      FR(M+1)=FR(MR+1)
      FR(MR+1)=TR
      TI=FI(M+1)
      FI(M+1)=FI(MR+1)
      FI(MR+1)=TI
    2 CONTINUE
      L=1
    3 IF(L.GE.N) RETURN
      ISTEP=2*L
      EL=L
      DO 4 M=1,L
      A=DARCOS(-1.D0)*DFLOAT(1-M)/EL
      WR=DCOS(A)
      WI=DSIN(A)
      DO 4 I=M,N,ISTEP
      J=I+L
      TR=WR*FR(J)-WI*FI(J)
      TI=WR*FI(J)+WI*FR(J)
      FR(J)=FR(I)-TR
      FI(J)=FI(I)-TI
      FR(I)=FR(I)+TR
    4 FI(I)=FI(I)+TI
      L=ISTEP
      GO TO 3
      END
```

```
C               ***   PROGRAM KCVOR-M   ***
C
C                    Paul R. Barré
C                    1 JUNE 1986
C
C      THIS PROGRAM MODELS AN IDEAL VOR NAVIGATION SYSTEM AND SIMULATES
C      ALFORD LOOP ANTENNA END PLATE ADJUSTMENTS FOR REDUCTION OF
C      OCTANTAL ERROR.
C
C      THE AZIMUTH IS INCREMENTED IN 5-DEGREE STEPS FROM 0 TO 360
C      DEGREES (73 times).  FOR A GIVEN AZIMUTH ANGLE, TIME IS
C      INCREMENTED FROM 0 TO 1/30 SECONDS IN 256 STEPS IN ORDER
C      TO SIMULATE RECEIVING A FULL PERIOD OF SIGNAL WITH APPROPRIATE
C      RESOLUTION.
C
C      A FAST FOURIER TRANSFORM IS USED TO DETERMINE THE PHASE
C      OF THE RECEIVED 30 HZ SIGNAL.  THE ERROR IS THEN CALCULATED
C      USING THE DIFFERENCE BETWEEN THE AZIMUTH AND THE PHASE OF
C      THE 30 HZ SIGNAL.
C
C      MMPLOT IS THEN USED TO PLOT ERROR VS. AZIMTUH
C
C      THIS VERSION USES A DOUBLE PRECISION FFT ROUTINE
C
C      THE FFT ROUTINE(DPFFT) MUST BE PASSED THE REAL AND
C      IMAGINARY COMPONENT ARRAYS AND THE NUMBER OF DATA
C      POINTS AS A POWER OF 2 (I.E. FOR 256 DATA POINTS, 8 IS
C      PASSED TO THE FFT ROUTINE, 256=2**8).
C
C
       IMPLICIT COMPLEX (C)
       IMPLICIT REAL*8 (A,B,D-H,O-Y)
       IMPLICIT LOGICAL(F)
       COMPLEX CREC, CE, C
       DIMENSION XR(256),XI(256 ,CREC(256)
       DIMENSION ZXP(73),ZYP(73 ,XA(4),YA(4),RA(4),CE(4),C(4)
C
C       SET CONSTANTS
C
       DATA VC/3.D8/,RFREQ/115.D6/,D/0.656D0/,R/5000.D0/
       DATA XA/0.D0,-.199D0,.199D0,0.D0/,YA/.199D0,0.D0,0.D0,-.199D0/
       PI = DACOS(-1.D0)
       BETA = (2.D0*PI*RFREQ)/VC
       OMEGAM = 2.D0*PI*30.D0
C
C      OUTSIDE LOOP USED TO ZERO IN ON OPTIMUM "ELLIPSE" FACTOR
C
       DO 91 L=1,11
          A=0.9608D0+FLOAT(L-1)*0.00008D0
          B=2.D0-A
          DO 30 IAZ = 1,73
```

```
            AZ = FLOAT(IAZ-1)*5.D0
            AZR = AZ * PI/180.D0
C
C           FIND X,Y COORDINATES AND CALCULATE "ELLIPSE" FACTOR
C
            X = R*DSIN(AZR)
            Y = R*DCOS(AZR)
            AEF = 1.D0 / DSQRT( A*DCOS(AZR)**2 + B*DSIN(AZR)**2 )
            BEF = 1.D0 / DSQRT( B*DCOS(AZR)**2 + A*DSIN(AZR)**2 )
C
C           THIS LOOP CALCULATES THE DISTANCE(R) FROM EACH ARRAY
C           ELEMENT TO THE OBSERVATION POINT
C
            DO 10 I = 1,4
              RA(I) = DSQRT((X-XA(I))**2+(Y-YA(I))**2) - R
              C(I) = CMPLX(0.D0,-BETA*RA(I))
              CTEMP = C(I)
              IF(I.EQ.1) CE(I) = CEXP(CTEMP) * AEF
              IF(I.EQ.2) CE(I) = BEF * CEXP(CTEMP)
              IF(I.EQ.3) CE(I) = BEF * CEXP(CTEMP)
              IF(I.EQ.4) CE(I) = CEXP(CTEMP) * AEF
10          CONTINUE
            CP1 = CE(1) - CE(4)
            CP2 = CE(3) - CE(2)
C
C           CYCLE TIME FROM 0 TO 1/30 SECONDS IN 256 STEPS
C
            DO 20 INC = 1,256
              T = FLOAT(INC-1)/(256.D0*30.D0)
              CBIAS = CMPLX(0.D0,2.D0)
C
C             CALCULATE RECEIVED FIELD FOR GIVEN TIME AND POSITION
C
              CREC(INC) = CBIAS +  CP1*DSIN(OMEGAM*T) + CP2*DCOS(OMEGAM*T)
              CTEMP = CREC(INC)
              XR(INC) = REAL(CTEMP)
              XI(INC) = AIMAG(CTEMP)
20          CONTINUE
C
C           CALL FAST FOURIER TRANSFORM ROUTINE
C
            CALL PDFFTB(XR,XI,8)
C
C       LOOK THE 30 HERTZ COMPONENT AND DETERMINE THE PHASE AND MAGNITUDE
C
            NI = 2
            FREALZ=.FALSE.
            FIMAGZ=.FALSE.
            VAZ=DATAN2(XI(NI),XR(NI))*(180.0/PI)
            IF((XI(NI).LT.1.E-4).AND.(XI(NI).GT.-1.E-4)) THEN
              VAZ=-180.
```

```
              IF(XR(NI).GT.0.0) VAZ=0.0
              FIMAGZ=.TRUE.
            END IF
            IF((XR(NI).LT.1.E-4).AND.(XR(NI).GT.-1.E-4)) THEN
              VAZ=-90.
              IF(XI(NI).GT.0.0) VAZ=90.
              FREALZ=.TRUE.
            END IF
            IF((FREALZ).AND.(FIMAGZ)) THEN
              VAZ=9999999.
              WRITE(*,103)
103           FORMAT(/1X,'NO SIGNAL RECEIVED')
            END IF
C
C           ADJUST PHASE SO ALL VALUES ARE BEWTEEN 0 AND 360 DEGREES
C
            IF(VAZ.LT.0.D0) VAZ = VAZ + 360.D0
C
C           CALCULATE ERROR BETWEEN AZIMUTH ANGLE AND RECEIVED PHASE
C
            ERROR = AZ - VAZ
            ZXP(IAZ)=AZ
            ZYP(IAZ)=ERROR
            PRINT 2, AZ,VAZ,ERROR
2           FORMAT(1X,3F15.5)
30        CONTINUE
C         CALL MMPLOT(ZXP,ZYP,73,1,ZXLAB,ZYLAB)
91      CONTINUE
        STOP
        END
```

```
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C
                            PROGRAM  GVOR
C
C                           Paul R. Barré
C                           1 JUNE 1986
C
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C
C       THIS PROGRAM HELPS TO MODEL THE VOR NAVIGATION SYSTEM, USING
C       A COMPLEX ARITHMETIC, DOUBLE-PRECISION ALGORITHM.
C
C       SUBROUTINE "NTG" READS IN 4 SETS OF ANTENNA CURRENTS FROM
C       "NEC-2"s OUTPUT FILE (other half of model), ALONG WITH WAVELENGTH
C       AND OBSERVATION POINT DISTANCE.  GVOR PHASES THESE
C       OUTPUTS INTO A VOR ARRAY SIGNAL.
C
C       THE AZIMUTH ANGLE IS INCREMENTED IN 5 DEGREE STEPS FROM 0 TO 360
C       DEGREES (73 times).  RADIATING ANTENNA PAIRS AND A VOR REFERENCE
C       SIGNAL ARE FORMED.  FOR A GIVEN AZIMUTH, TIME IS INCREMENTED
C       FROM 0 TO 1/30 SECONDS IN 256 STEPS IN ORDER TO SIMULATE
C       RECEIVING A FULL PERIOD OF SIGNAL WITH APPROPRIATE RESOLUTION.
C
C       THEN, A FAST FOURIER TRANSFORM IS USED TO DETERMINE THE PHASE
C       OF THE VARIABLE 30 HZ SIGNAL.  THE ERROR IS THEN CALCULATED
C       USING THE DIFFERENCE BETWEEN THE PHASE OF THE REFERENCE SIGNAL
C       (from NEC) AND THE GVOR CALCULATED PHASE OF THE VARIABLE SIGNAL.
C
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C
C                           VARIABLE LIST
C
C   AIMVLT = IMAGINARY FAR FIELD VOLTAGE FROM 1 OF 4 "NEC" MODEL RUNS
C       AZ = TRUE AZIMUTH ANGLE IN DEGREES -- defined by GVOR
C      AZN = TRUE AZIMUTH ANGLE IN DEGREES -- read from NEC
C      AZR = TRUE AZIMUTH ANGLE IN RADIANS -- defined by GVOR
C     AZRN = TRUE AZIMUTH ANGLE IN RADIANS -- converted from AZN
C       CE = COMPLEX E-FIELD AT OBSERVATION PT. DUE TO 1 OF 4 ANTENNAS
C      CP1 = COMPLEX E-FIELD FOR ANTENNA PAIR #1 (figure eight pattern)
C      CP2 = COMPLEX E-FIELD FOR ANTENNA PAIR #2 (figure eight pattern)
C     CREC = ROTATING CARDIOD PATTERN (variable signal)
C     CREF = ISOTROPIC PATTERN (reference signal)
C    ERROR = DIFF BTW TRUE AZIMUTH POSITION AND MODELED AZIMUTH POSITION
C     FAZD = PHASE OF FAR FIELD VLTG IN DEG. (1 of 4, generated by NEC)
C     FAZR = PHASE OF FAR FIELD VOLTAGE IN RADIANS
C       NI = POINTER TO THE 30 HZ FREQUENCY COMPONENT (output by DPFFT)
C   OMEGAM = RADIAN FREQUENCY OF SYSTEM (30 Hz)
C      PHI = TRUE AZIMUTH OUTPUT BY NEC
C        R = OBSERVATION POINT DISTANCE IN METERS
C     REFD = PHASE OF REFERENCE SIGNAL IN DEGREES
C   RLVLTG = REAL FAR FIELD VOLTAGE FROM 1 OF 4 "NEC" MODEL RUNS
```

```
C           T = CORRESPONDS TO TIME
C        VAZD = VOR SYSTEM PHASE OUTPUT IN DEGREES
C      VLTSPM = MAGNITUDE OF FAR FIELD VOLTAGE (1 of 4, generated by NEC)
C          XI = IMAGINARY PART OF VARIABLE SIGNAL (rotating cardiod)
C          XR = REAL PART OF VARIABLE SIGNAL (rotating cardiod)
C
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C
      IMPLICIT COMPLEX*16 (C)
      IMPLICIT REAL*8 (A,B,D-H,O-Y)
      DIMENSION XVR(256),XVI(256)
      DIMENSION CE(4)
      DIMENSION PHI(73,4),VLTSPM(73,4),FAZD(73,4),AZN(73)
      DIMENSION RLVLTG(73,4),AIMVLT(73,4)
C
C     SET CONSTANTS
C
      PI = DACOS(-1.D0)
      OMEGAM = 2.D0*PI*30.D0
C
C     GET INPUT DATA FROM NEC AND PUT INTO USABLE FORM
C
      CALL NTG(PHI,VLTSPM,FAZD)
      DO 55 I=1,73
        AZN(I) = PHI(I,1)
        DO 55 N=1,4
         FAZR=FAZD(I,N)*PI/180.D0
         RLVLTG(I,N)=VLTSPM(I,N)*DCOS(FAZR)
         AIMVLT(I,N)=VLTSPM(I,N)*DSIN(FAZR)
55    CONTINUE
C
C     OUTSIDE LOOP INCREMENTS AZIMUTH ANGLE IN 5 DEGREE STEPS
C
1     DO 30 IAZ = 1,73
        AZ = DFLOAT(IAZ-1)*5.D0
        AZR = AZ * PI/180.D0
        AZRN=AZN(IAZ) * PI/180.D0
        IF(AZR.NE.AZRN)  THEN
        WRITE(6,112)
112     FORMAT(1X,'AZIMUTH ANGLE FROM NEC DOES NOT MATCH GVOR AZIMUTH')
        STOP
        END IF
C
C       THIS LOOP CALCULATES THE COMPLEX E-FIELD AT THE OBSERVATION
C       POINT AND ALSO DETERMINES IT'S PHASE
C
        DO 10 I = 1,4
          CE(I)=DCMPLX(RLVLTG(IAZ,I),AIMVLT(IAZ,1))
10      CONTINUE
C
```

```
                    CP1 = CE(1) - CE(4)
                    CP2 = CE(3) - CE(2)
                    CREF=CE(1)+CE(2)+CE(3)+CE(4)
C
C          CYCLE TIME FROM 0 TO 1/30 SECONDS IN 256 STEPS
C
           DO 20 INC = 1,256
             T = DFLOAT(INC-1)/(256.D0*30.D0)
C            CALCULATE RECEIVED FIELD FOR GIVEN TIME AND POSITION
             CREC=CREF+CP1*DSIN(OMEGAM*T)+CP2*DCOS(OMEGAM*T)
             XVR(INC) = DREAL(CREC)
             XVI(INC) = DIMAG(CREC)
    20     CONTINUE
C
C          CALL FAST FOURIER TRANSFORM ROUTINE
C
           CALL DPFFT(XVR,XVI,8)
C
C          LOOK AT THE 30 HERTZ COMPONENT AND DETERMINE THE PHASE
C
           NI = 2
           VARD = DATAN2(XVI(NI),XVR(NI))*(180.D0/PI)
           IF(VARD.LT.0.0D0)   VARD=VARD+360.D0
           IF(VARD.GT.360.D0)  VARD=VARD-360.D0
C
C          OBTAIN THE PHASE OF THE REFERENCE SIGNAL
C
           REFD=DATAN2(DIMAG(CREF),DREAL(CREF))*180.D0/PI
           IF(REFD.GT.360.D0)  REFD=REFD-360.D0
           IF(REFD.LT.0.0D0)   REFD=REFD+360.D0
C
C          COMBINE ROTATING CARDIOD (VARD) AND ISOTROPIC REFERENCE SIGNAL,
C          AND ACCOUNT FOR INITIAL PHASING OF TONE WHEEL & GONIOMETER
C
           VORAZD=(VARD+135.D0)-(REFD+90.D0)
           IF(VORAZD.GT.360.D0)  VORAZD=VORAZD-360.D0
           IF(VORAZD.LT.0.0D0)   VORAZD=VORAZD+360.D0
C
C          CALCULATE ERROR BETWEEN AZIMUTH ANGLE AND RECEIVED PHASE
C
           ERROR = VORAZD - AZ
           IF(ERROR.LT.-180.D0) ERROR=ERROR+360.D0
           IF(ERROR.GT.180.D0) ERROR=ERROR-360.D0
           PRINT 2, AZ,VORAZD,ERROR
    2      FORMAT(1X,3F15.5)
           WRITE(3,919)AZ,ERROR
   919     FORMAT(2F15.5)
    30     CONTINUE
           STOP
           END
```

```
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C
C    THIS SUBROUTINE PROVIDES AN INTERFACE BETWEEN THE VOR MODEL 'GVOR'
C    AND THE 'NUMERICAL ELECTROMAGNETIC CODE'.
C
C       ***********************************************
        SUBROUTINE NTG(PHI,VLTSPM,FAZ)
C       ***********************************************
C
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
        IMPLICIT REAL*8 (A,B,D-H,O-Z)
        IMPLICIT COMPLEX*16 (C)
        REAL*8  PHI,VLTSPM,FAZ
        CHARACTER*12  POLARIZATION,TEST1
        DIMENSION  PHI(73,4),VLTSPM(73,4),FAZ(73,4)
        DATA POLARIZATION/'POLARIZATION'/
        PI=DACOS(-1.D0)
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C    D O   O N C E   F O R   E A C H   A N T E N N A
C
        DO 66 N=1,4
C
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C    R E A D S   C O M P L E X   C U R R E N T S   F O R   G V O R
        DO 100 I=1,3000
            READ(4,2,END=77) TEST1
2           FORMAT(55X,A12)
            IF(POLARIZATION.EQ.TEST1) GOTO 333
100       CONTINUE
C
333        READ(4,44)
44        FORMAT(/)
C
        DO 8 J=1,73
            READ(4,5,END=77) PHI(J,N),VLTSPM(J,N),FAZ(J,N)
5           FORMAT(10X,F7.2,82X,E12.5,2X,F7.2)
8         CONTINUE
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C    S E C T I O N   T O   C H E C K   O U T P U T
C          WRITE(6,7)N
7          FORMAT(1X,'N =',I3)
           DO 9 J=1,73
C              WRITE(6,6) J,PHI(J,N),VLTSPM(J,N),FAZ(J,N)
6              FORMAT(3X,I2,3X,F7.2,3X,E11.5,3X,F7.2)
9          CONTINUE
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
C
66      CONTINUE
        RETURN
```

```
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
77      WRITE(6,33)
33      FORMAT(////'  Error in data fetch from NEC.OUT by NTG'////)
        STOP
CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
        END
```

NECIN.DAT
(NEC-2 input file for modeling a baseline VOR -- no scatterers)

Paul R. Barré
1 JUNE 1986

```
CM                        GVOR ANTENNA MODEL
CM
CM   EACH STRUCTURE (1,2,3,4) IS A SQUARE ANTENNA WITH ALL OF IT'S SEGMENTS
CM   BEING VOLTAGE SOURCES.  EACH ANTENNA HAS A CIRCULAR RADIATION PATTERN
CM   (ALFORD LOOP).  THE COMBINED ANTENNAS FORM A VOR ANTENNA ARRAY.
CM
CM                                    Y
CM                                    :
CM                             3      :      1
CM                                    :
CM                          --------|--------X
CM                                    :
CM                             4      :      2
CM                                    :
CM
CM   NEC WILL RUN EACH ANTENNA ELEMENT SEQUENTIALLY AND OUTPUT THE FOUR
CM   STREAMS OF DATA TO A VOR SIMULATION PROGRAM.
CM
CM   ANTENNA ONE RUN
CE
GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
GM 0 0 0. 0. 0. .14500 .14500 1.2192 1.0
GE
GN 1
FR 0 0 0 0 110.2
EX 0 1 1 0 20000.0
EX 0 2 1 0 20000.0
EX 0 3 1 0 20000.0
EX 0 4 1 0 20000.0
RP 0 1 73 1500 85.77 0. 0. 5. 18525.
NX
CM   ANTENNA TWO RUN
CE
GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
GM 0 0 0. 0. 0. .14500 -.14500 1.2192 1.0
GE
GN 1
FR 0 0 0 0 110.2
EX 0 1 1 0 20000.0
```

```
EX 0 2 1 0 20000.0
EX 0 3 1 0 20000.0
EX 0 4 1 0 20000.0
RP 0 1 73 1500 85.77 0. 0. 5. 18525.
NX

CM    ANTENNA THREE RUN
CE
GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
GM 0 0 0. 0. 0. -.14500 .14500 1.2192 1.0
GE
GN 1
FR 0 0 0 0 110.2
EX 0 1 1 0 20000.0
EX 0 2 1 0 20000.0
EX 0 3 1 0 20000.0
EX 0 4 1 0 20000.0
RP 0 1 73 1500 85.77 0. 0. 5. 18525.
NX
CM    ANTENNA FOUR RUN
CE
GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
GM 0 0 0. 0. 0. -.14500 -.14500 1.2192 1.0
GE
GN 1
FR 0 0 0 0 110.2
EX 0 1 1 0 20000.0
EX 0 2 1 0 20000.0
EX 0 3 1 0 20000.0
EX 0 4 1 0 20000.0
RP 0 1 73 1500 85.77 0. 0. 5. 18525.
EN
```

NECSCIN.DAT
(NEC-2 input file for modeling a "VOR + scatterer" configuration)

Paul R. Barré
1 JUNE 1986

```
CM                          GVOR ANTENNA MODEL
CM
CM EACH STRUCTURE (1,2,3,4) IS A SQUARE ANTENNA WITH ALL OF IT'S SEGMENTS
CM BEING VOLTAGE SOURCES.  EACH ANTENNA HAS A CIRCULAR RADIATION PATTERN
CM (ALFORD LOOP).  THE COMBINED ANTENNAS FORM A VOR ANTENNA ARRAY.
CM
CM                                          Y
CM                                          |
CM                                    3     |    1
CM                                          |
CM                              --------|--------X
CM                                          |
CM                                    4     |    2
CM                                          |
CM
CM    NEC WILL RUN EACH ANTENNA ELEMENT SEQUENTIALLY AND OUTPUT THE FOUR
CM    STREAMS OF DATA TO A VOR SIMULATION PROGRAM.
CM
CM OKLAHOMA CITY, 2048, R = 11115.4(m), ELEV ANG = 82.94 DEG
CM
CM    ANTENNA ONE RUN
CE
GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
GM 0 0 0. 0. 0. .14500 .14500 1.2192 1.0
GW 15 2 0. -0.0525 -0.21 0. 0.0525 -0.21 .00795
GW 16 6 0. -0.0525 -0.21 0. -0.0525 0.0 0.00795
GW 17 6 0. 0.0525 -0.21 0. 0.0525 0.0 0.00795
GW 18 3 0. -0.0525 0.0 0. -0.5125 0.0 0.00795
GW 19 3 0. 0.0525 0.0 0. 0.5125 0.0 0.00795
GM 0 0 0. -10.83 0. 1.310 0. 1.2192 15.0
GM 0 0 0. 0. 0.0 0. 0. 0. 15.0
GE
GN 1
FR 0 0 0 0 110.2
EX 0 1 1 0 20000.0
EX 0 2 1 0 20000.0
EX 0 3 1 0 20000.0
EX 0 4 1 0 20000.0
RP 0 1 73 1500 82.94 0. 0. 5. 11115.4
NX
CM    ANTENNA TWO RUN
CE
```

```
GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
GM 0 0 0. 0. 0. .14500 -.14500 1.2192 1.0
GW 15 2 0. -0.0525 -0.21 0. 0.0525 -0.21 .00795
GW 16 6 0. -0.0525 -0.21 0. -0.0525 0.0 0.00795
GW 17 6 0. 0.0525 -0.21 0. 0.0525 0.0 0.00795
GW 18 3 0. -0.0525 0.0 0. -0.5125 0.0 0.00795
GW 19 3 0. 0.0525 0.0 0. 0.5125 0.0 0.00795
GM 0 0 0. -10.83 0. 1.310 0. 1.2192 15.0
GM 0 0 0. 0. 0.0 0. 0. 0. 15.0
GE
GN 1
FR 0 0 0 0 110.2
EX 0 1 1 0 20000.0
EX 0 2 1 0 20000.0
EX 0 3 1 0 20000.0
EX 0 4 1 0 20000.0
RP 0 1 73 1500 82.94 0. 0. 5. 11115.4
NX
CM    ANTENNA THREE RUN
CE
GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
GM 0 0 0. 0. 0. -.14500 .14500 1.2192 1.0
GW 15 2 0. -0.0525 -0.21 0. 0.0525 -0.21 .00795
GW 16 6 0. -0.0525 -0.21 0. -0.0525 0.0 0.00795
GW 17 6 0. 0.0525 -0.21 0. 0.0525 0.0 0.00795
GW 18 3 0. -0.0525 0.0 0. -0.5125 0.0 0.00795
GW 19 3 0. 0.0525 0.0 0. 0.5125 0.0 0.00795
GM 0 0 0. -10.83 0. 1.310 0. 1.2192 15.0
GM 0 0 0. 0. 0.0 0. 0. 0. 15.0
GE
GN 1
FR 0 0 0 0 110.2
EX 0 1 1 0 20000.0
EX 0 2 1 0 20000.0
EX 0 3 1 0 20000.0
EX 0 4 1 0 20000.0
RP 0 1 73 1500 82.94 0. 0. 5. 11115.4
NX
CM    ANTENNA FOUR RUN
CE
GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
GM 0 0 0. 0. 0. -.14500 -.14500 1.2192 1.0
```

```
GW 15 2 0. -0.0525 -0.21 0. 0.0525 -0.21 .00795
GW 16 6 0. -0.0525 -0.21 0. -0.0525 0.0 0.00795
GW 17 6 0. 0.0525 -0.21 0. 0.0525 0.0 0.00795
GW 18 3 0. -0.0525 0.0 0. -0.5125 0.0 0.00795
GW 19 3 0. 0.0525 0.0 0. 0.5125 0.0 0.00795
GM 0 0 0. -10.83 0. 1.310 0. 1.2192 15.0
GM 0 0 0. 0. 0.0 0. 0. 0. 15.0
GE
EN 1
FR 0 0 0 0 110.2
EX 0 1 1 0 20000.0
EX 0 2 1 0 20000.0
EX 0 3 1 0 20000.0
EX 0 4 1 0 20000.0
RP 0 1 73 1500 82.94 0. 0. 5. 11115.4
EN
```

APPENDIX C

USER'S SECTION

General guidelines for NEC-2 wire modeling are presented in this

section. Also, an example is given that illustrates how to add a

scatterer to the baseline VOR model input file, NECIN.DAT, with the

intention of introducing the reader to the NEC-2 "punched card" format.

This section is not meant to provide a working knowledge of NEC-2, but

only to give a general description of the user interface. The more

interested reader is refered to the NEC-2 User's Guide [1]. The

complete listing for NECIN.DAT may be found in Appenidex B.

Proper choice of the wire segments for a model is the most critical step

in obtaining accurate results. Wire segments are defined by the

coordinates of their two end points and their radius. Both geometrical

and electrical factors must be considered when modeling a structure with

wire segments.

Geometrically, the segments should follow the conductor paths as closely

as possible, using a piece-wise linear approach on curves. Also, wires

should be connected together only by joining segment ends. Although

segments are treated as connected if the separation of their ends is

less than about 10^{-3} times the length of the shortest segment, the

segment ends of two joining wires should have identical space

coordinates when possible. The angle of intersection for wire segments

is not restricted in any manner.

Electrically, a wire may be given any radius "a" as long as $6*Pi*a$

divided by the exciting wavelength is much less than one. Furthermore,

a wire may need to be divided into segments to satisfy the electrical

requirements of segment length relative to wavelength. The number of
segments that a wire can be divided into is up to the user. However, as
a general guide for accuracy, wire segments should be less than 0.1
times the exciting wavelength and greater than 0.05 times this
wavelength. There are certain conditions under which these limits may
be extended: somewhat longer segments may be acceptable for long wires
with no abrupt changes, whereas shorter segments may be necessary for
modeling critical areas of an antenna.

In NEC-2 a wire is constructed (input to the program) in the following
manner:

1. The wire is first given a tag number. The number of segments that
    this wire is divided into is also specified. A particular wire
    segment can be uniquely identified by its tag and segment number,
    sort of like a first and last name.

2. The location of the wire with respect to the origin of a
    rectangular coordinate system is then given by two pairs of XYZ
    coordinates. Which end of the wire is specified as end one does
    not matter unless the wire is to be excited by a voltage source.
    In this case, end one takes on negative polarity while end two
    becomes the positive side, causing current to flow from point one
    to point two.

3. The wire radius is then specified. If a wire radius is needed that
    is larger than the limit specified above, then NEC-2 can be asked
    to perform all calculations on that wire using an extended thin

wire kernel. With the extended thin wire kernel, a wire is modeled
as a tube rather than as a filament. [Special treatment must be
given if the wire to be modeled in this manner has a bend in it,
because the current will not be continuous around the circumference
of the tube at the bend.]

Data to describe an antenna and its environment and to request
computation of antenna characteristics are input by means of a "punched
card", one line at a time, format. The data card deck for a single run
of NEC-2 consists of three types of data cards: (1) COMMENTS: The deck
begins with one or more comment cards (CM), followed by the CE card
which stands for "Comments End". Lines 1 and 2 of the NECIN.DAT excerpt
shown below form the comment section for Antenna One Run. (2) GEOMETRY:
Geometry data cards specify the geometry of the antennas and scatterers.
Lines 3 through 7 specify antenna #1 to the program, and line eight, the
GE card, ends the Geometry section. (3) CONTROL: The deck ends with a
section of program control cards specifying electrical parameters such
as frequency, loading and excitation, and requests for calculation of
antenna currents and fields. Lines 9 through 15 below specify a ground
plane, the frequency, the excitations, and the request for radiation
patterns for the first of four program runs.

Example: Add a scatterer to the NECIN.DAT excerpt given below, Antenna-
One-Run, that has the same dimensions as the transmitting antenna, but
is located symmetrically on the other side of the X axis. The X and Z

coordinates remain the same. Note that the transmitting antenna is

defined by lines 3 through 6, and positioned by line 7.

NECIN.DAT

```
                    Column Numbers
          12345678901234567890123456789012345678901234567890
Card #
  1       CM    ANTENNA ONE RUN
  2       CE
  3       GW 1 1 -0.100 -0.100 0.0 -0.100 0.100 0.0 .0005
  4       GW 2 1 -0.100 0.100 0.0 0.100 0.100 0.0 .0005
  5       GW 3 1 0.100 0.100 0.0 0.100 -0.100 0.0 .0005
  6       GW 4 1 0.100 -0.100 0.0 -0.100 -0.100 0.0 .0005
  7       GM 0 0 0. 0. 0. .14500 .14500 1.2192 1.0
  8       GE
  9       GN 1
 10       FR 0 0 0 0 110.2
 11       EX 0 1 1 0 20000.0
 12       EX 0 2 1 0 20000.0
 13       EX 0 3 1 0 20000.0
 14       EX 0 4 1 0 20000.0
 15       RP 0 1 73 1500 85.77 0. 0. 5. 18525.
 16       NX
 17       CM    ANTENNA TWO RUN ... etc.
```

Solution: The coordinate transformation card (GM) is used to form

a duplicate of the transmitting antenna and locate it in the desired

position. This full ability of this card is to translate or rotate a

structure with respect to the coordinate system, or to generate new

duplicate structures translated or rotated from the original. The card

has the following format:

GM   ITG1   NRPT   ROX   ROY   ROZ   XS   YS   ZS   ITS

where ITG1 is the tag number increment, NRPT is the number of new

structures to be generated, ROX-Y-Z specify rotation, X-Y-ZS specify

translation, and ITS is the tag number at which to begin duplication (a

process that continues up to the specifying GM card).

The tag numbers for the four GW cards (that define the antenna) run from 1 to 4. So that the next tag number is in sequence (5), ITGI is set to 4 (+4=5). Only one new structure is to be generated, so NRPT is set to 1. All rotation parameters are set to 0. For the translation parameters, YS is set to -(2 * 0.14500), and the other two are set to zero. The card is placed in the file between lines 7 and 8, and has the following appearance:

                GM   4   1   0.   0.   0.   0.   -0.290   0.   1.

It should be noted that the NEC-2 user interface assumes an understanding of the theory and solution method employed. The user encountering the code for the first time should begin with the User's Guide and try to model some simple antennas. The understanding gained will assist in the proper preparation of input and the proper interpretation of output.

VIII. ABSTRACT

Barré, Paul Reldon.   June, 1986 Electrical Engineering

Implementation of the Numerical Electromagnetic Code (NEC-2) for
Modeling the VOR Navigation System in the Presence of Parasitic
Scatterers.   (107pp.)

A computer model has been developed that estimates bearing error for a

VOR airborne navigation system operating in the presence of small,

parasitic scatterers such as antennas, antenna masts, and guy wires.

This model, which is written using FORTRAN 77, interacts with an

unmodified version of the Numerical Electromagnetics Code (NEC-2) to

obtain the pertinent scattered-field data. These data are then used to

calculate the composite field, and indicated bearing, at the airborne

receiver location. Modeled results consist of plots of bearing error

versus "true" bearing. Comparisons of modeled and measured data are

presented.

The azimuth angle of an aircraft with respect to a VOR station is

determined by the phase of the received audio sinusoid generated by a

limacon radiation pattern that rotates in space due to appropriate time-

varying phasing between four Alford loop antennas. To model the effects

of scatterers on system accuracy, each loop antenna is sequentially

modeled in the presence of the scatterer using NEC-2, and field data are

recorded for a far-field orbit around the source-scatterer

configuration; this process is repeated for each of the four loop

antennas thus providing complete information about complex path loss

between each loop antenna and the observation point in the presence of

the scatterer. The received audio waveform is then constructed at each observation point by applying the appropriate modulation to each of the loop antennas, adjusted by the complex loss values given by NEC-2. The phase and distortion of the received audio waveform is determined using a Fast Fourier Transform algorithm.

The key points addressed include approximations for modeling the Alford Loop antennas (which involves attempts at surface patch excitation), representation of the ground plane, model diagnostics, and comparisons of modeled and measured data. A user section is also included to give guidance in the modeling of parasitic scatterers.